

AECOM Australia Pty Ltd 17 Warabrook Boulevard Warabrook NSW 2304 PO Box 73 Hunter Region MC NSW 2310 Australia www.aecom.com +61 2 4911 4900 tel +61 2 4911 4999 fax ABN 20 093 846 925

19 August 2020

Chris Schneider Managing Director National Ceramic Industries Australia PO Box 765 Maitland NSW 2320

Dear Chris,

## Environmental Monitoring for National Ceramic Industries Australia - July 2020

Please find enclosed the documentation for the environmental monitoring carried out for National Ceramic Industries Australia during July 2020. Sampling methodology and adopted assessment criteria are detailed below.

## 1.0 Sampling Methodology

Sampling was performed by AECOM Australia Pty Ltd (AECOM) and sample analysis was carried out by ALS NATA accredited laboratory. All sampling and analysis was carried out in accordance with Environmental Protection Authority (EPA) approved methods with reference to the following Australian Standards:

- Monitoring of fine suspended particulates (PM<sub>10</sub>) on the EPA six day cycle in accordance with:
  - AS/NZS 3580.9.6 (2015) Methods for the Sampling and Analysis of Ambient Air Determination of Suspended Particulate Matter – PM<sub>10</sub> High Volume Sampler with Size Selective Inlet - Gravimetric Method.
- Monitoring of fluorides in ambient air in accordance with:
  - AS/NZS 3580.13.2 (2013) Determination of fluorides—Gaseous and acid-soluble particulate fluorides—Manual, double filter paper sampling.
- Meteorological monitoring in accordance with:
  - AS 3580.1.1 (2016) Methods for sampling and analysis of ambient air Part 1.1 Guide to siting air monitoring equipment; and
  - AS 3580.14 (2014) Methods for sampling and analysis of ambient air Part 14: Meteorological monitoring for ambient air quality monitoring.
- Monitoring of surface water quality in accordance with:
  - AS/NZS 5667.1:1998(R2016) Guidance on the design of sampling programs, sampling techniques and the preservation and handling of samples; and
  - AS/NZS 5667.4:1998(R2016) Guidance on sampling from lakes, natural and manmade.

## 2.0 Assessment Criteria

Suspended particulate loads are assessed against the impact assessment criteria defined in the Project Approval conditions (09\_0006 – National Ceramic Industries Australia Tile Manufacturing Facility Expansion Project, 19 January 2012). The assessment criteria for  $PM_{10}$  (particulate matter with an aerodynamic diameter of less than 10  $\mu$ m) are:

- 50 μg/m<sup>3</sup> over a 24-hour period; and
- 30 μg/m<sup>3</sup> as an annual average.

Ambient fluoride concentrations are assessed against the guidelines defined in NSW EPA *Approved Methods for the Modelling and Assessment of Air Pollutants in New South Wales* (NSW EPA (2016)). The NSW EPA impact assessment criteria for ambient fluoride are:

- 2.9 μg/m<sup>3</sup> over a 24-hour period; and
- 1.7 μg/m<sup>3</sup> over a 7-day period.



Surface waters are assessed in accordance with default trigger values for physical and chemical stressors for southeast Australia in the *Australian and New Zealand Guidelines for Fresh and Marine Water Quality* (ANZG, 2018). These values are:

- pH in the range of 6.5 8.5 (Table 3.3.2 NSW Lowland River); and
- Electrical conductivity (EC) in the range of 125 2200 µS/cm (Table 3.3.3 NSW Lowland River).

#### 3.0 Monitoring Results

Monitoring results for the month of July 2020 are presented in the attachments to this letter. Monitoring results for the preceding two months are also presented to demonstrate quarterly trends in results.

The July 2020 monitoring results show that all ambient  $PM_{10}$  results were below the short-term impact assessment criterion (50µg/m<sup>3</sup>) as defined in the DPIE Project Approval (Schedule 3, Condition 15, Table 2).

The PM<sub>10</sub> rolling annual average concentration at the South East site remains below the Project Approval annual criterion of 30  $\mu$ g/m<sup>3</sup> with an average of 23.0  $\mu$ g/m<sup>3</sup> following the July monitoring period. The North West annual average is currently above the criteria at 33.6  $\mu$ g/m<sup>3</sup> following the completion of the July monitoring period, largely due to elevated results recorded during November and December 2019 caused by regional heavy bushfire smoke.

Fluoride results for July remain below the relevant assessment criteria at both the North West and South East monitoring sites with no exceedances of either the 24 hour or 7 day criteria this month.

The adopted ANZG 2018 guidelines for pH and conductivity are the default trigger values for slightly disturbed aquatic ecosystems in NSW lowland rivers. pH measurements for July were recorded below the ANZG guideline 8.5 upper limit on all occasions except for 9 and 23 July. Importantly, Pond 4 was not observed to be discharging on these days. All conductivity measurements were within the relevant ANZG guidelines for July. Water temperature was also measured weekly however no guideline is available for assessment.

A figure showing the monitoring locations and monitoring results and plots can be found attached along with the wind rose for July. Laboratory certificates, field sheets and calibration data along with relevant meteorology data can be provided on request.

If you require any further information, please contact Cye Buckland on 0488 777 160.

Yours faithfully,

James Enright Scientist – Compliance Services james.enright@aecom.com

Direct Dial: +T +61 2 4911 4900 Direct Fax: +F +61 2 4911 4999

encl: Monitoring data tables and charts, monitoring locations, wind roses

AECOM in Australia and New Zealand is certified to ISO9001, ISO14001 AS/NZS4801 and OHSAS18001.

© AECOM Australia Pty Ltd (AECOM). All rights reserved.


... Went

Paul Wenta Principal Scientist - Air Quality paul.wenta@aecom.com

Mobile: +61 438 670 281 Direct Dial: +61 2 4911 4855 Direct Fax: +61 2 4911 4999


AECOM has prepared this document for the sole use of the Client and for a specific purpose, each as expressly stated in the document. No other party should rely on this document without the prior written consent of AECOM. AECOM undertakes no duty, nor accepts any responsibility, to any third party who may rely upon or use this document. This document has been prepared based on the Client's description of its requirements and AECOM's experience, having regard to assumptions that AECOM can reasonably be expected to make in accordance with sound professional principles. AECOM may also have relied upon information provided by the Client and other third parties to prepare this document, some of which may not have been verified. Subject to the above conditions, this document may be transmitted, reproduced or disseminated only in its entirety.

#### North West Monitoring Location - 24 hour PM10 Monitoring

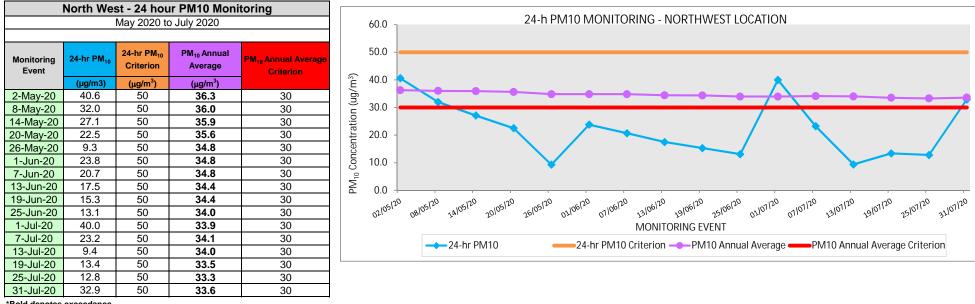


\*Bold denotes exceedance


North West - 7 Day Fluoride Monitoring								
May 2020 to July 2020								
Monitoring Event		Particulate Fluoride	Gaseous Fluoride	Total Fluoride	7-Day Guideline Criterion			
Start Date	End Date	(μg/m <sup>3</sup> as HF at STP)						
7-May-20	15-May-20	0.035	0.030	0.065	1.7			
15-May-20	21-May-20	0.027	0.106	0.133	1.7			
21-May-20	28-May-20	0.016	0.098	0.114	1.7			
28-May-20	4-Jun-20	0.041	0.040	0.081	1.7			
4-Jun-20	11-Jun-20	0.015	0.116	0.131	1.7			
11-Jun-20	18-Jun-20	0.073	0.063	0.136	1.7			
18-Jun-20	24-Jun-20	0.020	0.015	0.035	1.7			
24-Jun-20	2-Jul-20	0.024	0.059	0.083	1.7			
2-Jul-20	9-Jul-20	0.035	0.046	0.081	1.7			
9-Jul-20	16-Jul-20	0.010	0.028	0.038	1.7			
16-Jul-20	23-Jul-20	0.021	0.032	0.053	1.7			
23-Jul-20	30-Jul-20	0.023	0.064	0.087	1.7			
30-Jul-20	5-Aug-20	0.021	0.050	0.071	1.7			

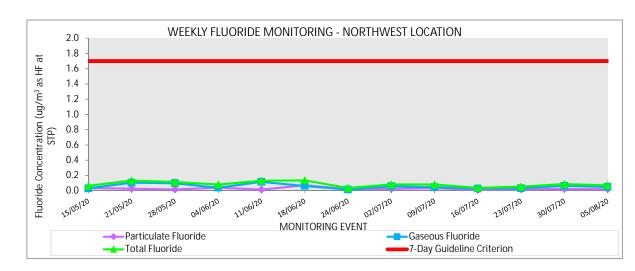


# North West Monitoring Location - 24 hour Fluoride Monitoring


North W	/est - 24 h	our Fluori	de Monito	oring	
	May 20	20 to July 2	020		
Monitoring Event	Particulate Gaseous		24-hr Total Fluoride	24-hr Total Fluoride Guideline Criterion	HF at STP)
	(μg/m <sup>3</sup> as HF at STP)	(µg/m <sup>3</sup> as HF at STP)	(µg/m <sup>3</sup> as HF at STP)	(µg/m <sup>3</sup> as HF at STP)	as
2-May-20	0.015	0.075	0.090	2.9	Eluoride Concentration ( $ng/m^3$
8-May-20	0.017	0.041	0.058	2.9	) ji
14-May-20	0.049	0.194	0.243	2.9	ion
20-May-20	0.032	0.154	0.186	2.9	rat
26-May-20	0.035	0.307	0.342	2.9	ent
1-Jun-20	0.086	0.1	0.186	2.9	JUC
7-Jun-20	0.017	0.156	0.173	2.9	U U
13-Jun-20	0.035	0.114	0.149	2.9	ide
19-Jun-20	0.014	0.071	0.085	2.9	Ion
25-Jun-20	0.032	0.036	0.068	2.9	E
1-Jul-20	0.068	0.119	0.187	2.9	
7-Jul-20	0.061	0.133	0.194	2.9	
13-Jul-20	0.014	0.156	0.170	2.9	
19-Jul-20	0.013	0.066	0.079	2.9	
25-Jul-20	0.014	0.177	0.191	2.9	
31-Jul-20	0.038	0.126	0.164	2.9	

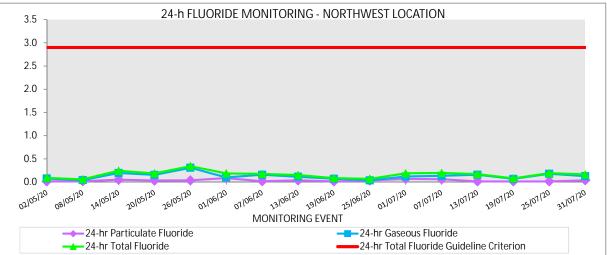


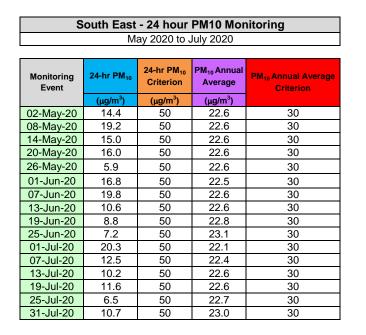

## South East Monitoring Location - 24 hour PM10 Monitoring

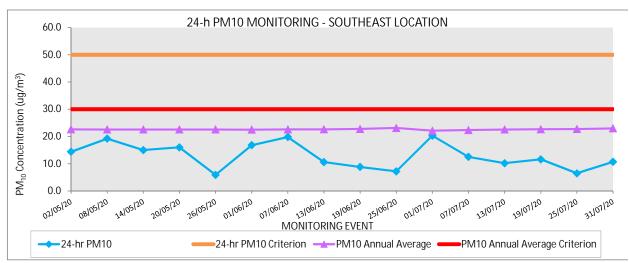

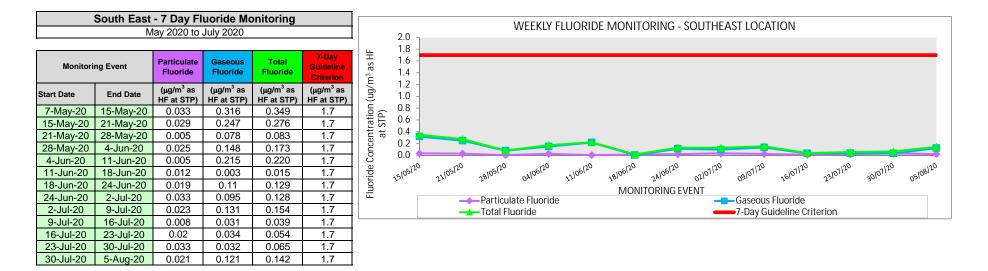

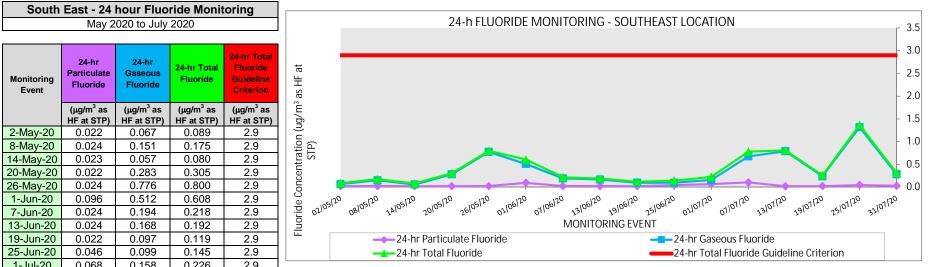

South	East - 24	nour Fluo	ride Monit	toring		
May 2020 to July 2020						
					.	
Monitoring Event	24-hr Particulate Fluoride	ulate Gaseous Eluoride		24-hr Total Fluoride Guideline Criterion		
	(μg/m <sup>3</sup> as HF at STP)	Concentration (un / m3				
2-May-20	0.022	0.067	0.089	2.9		
8-May-20	0.024	0.151	0.175	2.9		
14-May-20	0.023	0.057	0.080	2.9		
20-May-20	0.022	0.283	0.305	2.9		
26-May-20	0.024	0.776	0.800	2.9		
1-Jun-20	0.096	0.512	0.608	2.9		
7-Jun-20	0.024	0.194	0.218	2.9	1	
13-Jun-20	0.024	0.168	0.192	2.9		
19-Jun-20	0.022	0.097	0.119	2.9		
25-Jun-20	0.046	0.099	0.145	2.9		
1-Jul-20	0.068	0.158	0.226	2.9		
7-Jul-20	0.105	0.676	0.781	2.9		
13-Jul-20	0.021	0.79	0.811	2.9		
19-Jul-20	0.022	0.239	0.261	2.9		
25-Jul-20	0.047	1.319	1.366	2.9		

0.282


0.313


2.9

31-Jul-20

0.031


#### Pond 4 Monitoring Location - Weekly pH Monitoring

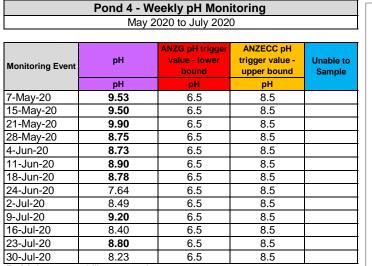

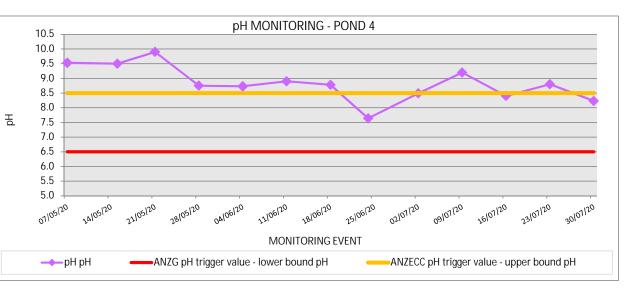

Bold denotes guidline exceedance

## Pond 4 Monitoring Location - Weekly EC Monitoring

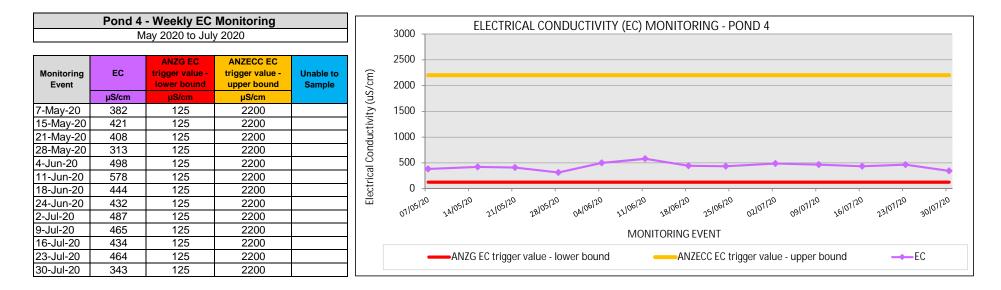

# Pond 4 Monitoring Location - Weekly Temperature Monitoring

