

19 December 2024

Chris Schneider Managing Director National Ceramic Industries Australia PO Box 765 Maitland NSW 2320

Dear Chris

Environmental Monitoring for National Ceramic Industries Australia - November 2024

Please find enclosed the documentation for the environmental monitoring carried out for National Ceramic Industries Australia during November 2024. Sampling methodology and adopted assessment criteria are detailed below.

1.0 Sampling Methodology

Sampling was performed by AECOM Australia Pty Ltd (AECOM) and sample analysis was carried out by ALS NATA accredited laboratory. All sampling and analysis were carried out in accordance with Environmental Protection Authority (EPA) approved methods with reference to the following Australian Standards:

- monitoring of fine suspended particulates (PM₁₀) on the EPA six-day cycle in accordance with:
 - AS/NZS 3580.9.6 (2015) Methods for the Sampling and Analysis of Ambient Air Determination of Suspended Particulate Matter – PM₁₀ High Volume Sampler with Size Selective Inlet – Gravimetric Method.
- monitoring of fluorides in ambient air in accordance with:
 - AS/NZS 3580.13.2 (2013) Determination of fluorides Gaseous and acid-soluble particulate fluorides Manual, double filter paper sampling.
- meteorological monitoring in accordance with:
 - AS 3580.1.1 (2016) Methods for sampling and analysis of ambient air Part 1.1 Guide to siting air monitoring equipment.
 - AS 3580.14 (2014) Methods for sampling and analysis of ambient air Part 14: Meteorological monitoring for ambient air quality monitoring.
- monitoring of surface water quality in accordance with:
 - AS/NZS 5667.1:1998 (R2016) Guidance on the design of sampling programs, sampling techniques and the preservation and handling of samples.
 - AS/NZS 5667.4:1998 (R2016) Guidance on sampling from lakes, natural and manmade.

2.0 Assessment Criteria

Suspended particulate loads are assessed against the impact assessment criteria defined in the Project Approval conditions (09_0006 – National Ceramic Industries Australia Tile Manufacturing Facility Expansion Project, 19 January 2012). The assessment criteria for PM_{10} (particulate matter with an aerodynamic diameter of less than 10 μ m) are:

- 50 μg/m³ over a 24-hour period
- 30 μ g/m³ as an annual average.

Ambient fluoride concentrations are assessed against the guidelines defined in NSW EPA Approved Methods for the Modelling and Assessment of Air Pollutants in New South Wales (NSW EPA (2022)).



The NSW EPA impact assessment criteria for ambient fluoride are:

- 2.9 μ g/m³ over a 24-hour period
- 1.7 μg/m³ over a 7-day period.

Surface waters are assessed in accordance with default trigger values for physical and chemical stressors for southeast Australia in the *Australian and New Zealand Guidelines for Fresh and Marine Water Quality* (ANZG, 2018). These values are:

- pH in the range of 6.5 8.5 (Table 3.3.2 NSW Lowland River)
- electrical conductivity (EC) in the range of 125 2200 μS/cm (Table 3.3.3 NSW Lowland River).

3.0 Monitoring Results

Monitoring results for the month of November 2024 are presented in the attachments to this letter. Monitoring results for the preceding two months are also presented to demonstrate quarterly trends in results.

The November 2024 monitoring results show that all ambient PM_{10} results were below the short-term impact assessment criterion (50 µg/m³) as defined in the DPIE Project Approval (Schedule 3, Condition 15, Table 2).

The PM₁₀ rolling annual average concentration at the Southeast site remains below the Project Approval annual criterion of 30 μ g/m³ with an average of 15.9 μ g/m³ following the November monitoring period. The Northwest annual average is also below the criteria and is sitting at 22.1 μ g/m³ following the completion of the November monitoring period.

Fluoride results for November remain below the relevant assessment criteria at both the Northwest and Southeast monitoring sites with no exceedances of either the 24-hour (2.9 μ g/m³) or 7-day (1.7 μ g/m³) criteria this month.

Pond 4, being the last detention pond on site before water potentially leaves the site is monitored for pH, Electrical Conductivity and Temperature on a weekly basis. The adopted ANZG 2018 guidelines for pH and conductivity are the default trigger values for slightly disturbed aquatic ecosystems in NSW lowland rivers.

pH measurements for November 2024 were within both the upper and lower limits of the adopted guidelines.

All electrical conductivity measurements for November were within both upper and lower limits of the adopted guidelines. Water temperature was also measured weekly however no guideline is available for assessment. Pond 4 was not observed to be flowing offsite throughout November 2024.

A figure showing the monitoring locations and monitoring results and plots can be found attached along with the wind rose for November. Laboratory certificates, field sheets and calibration data along with relevant meteorology data can be provided on request.

If you require any further information, please contact Cye Buckland on 0488 777 160.


Yours faithfully,

cye.buckland@aecom.com Mobile: +61 488 777 160

encl: Monitoring data tables and charts, wind rose, monitoring locations


North West Monitoring Location - 24 hour PM10 Monitoring

North West - 24 hour PM10 Monitoring					
September 2024 to November 2024					
·					
Monitoring Event	24-hr PM ₁₀	24-hr PM ₁₀ Criterion	PM ₁₀ Annual Average	PM ₁₀ Annual Average Criterion	
	(µg/m3)	(µg/m³)	(µg/m³)		
2-Sep-24	-	50	22.5	30	
8-Sep-24	22.0	50	22.6	30	
11-Sep-24	29.8	50	22.8	30	
14-Sep-24	17.3	50	22.6	30	
20-Sep-24	39.2	50	22.1	30	
26-Sep-24	15.0	50	21.8	30	
2-Oct-24	24.5	50	21.6	30	
8-Oct-24	34.1	50	22.0	30	
14-Oct-24	13.4	50	21.9	30	
20-Oct-24	17.5	50	21.9	30	
26-Oct-24	18.0	50	21.9	30	
1-Nov-24	13.5	50	21.7	30	
7-Nov-24	31.6	50	22.1	30	
13-Nov-24	12.3	50	21.7	30	
19-Nov-24	19.3	50	21.9	30	
25-Nov-24	23.4	50	22.1	30	

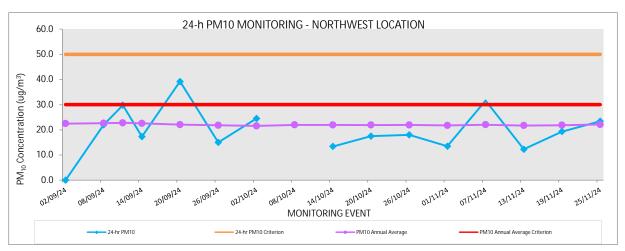

2 Sep sample failed to run. Catch up sample performed 11 Sep.

North West - 7 Day Fluoride Monitoring							
August 2024 to November 2024							
Monitoring Event		Particulate Fluoride	Gaseous Fluoride	Total Fluoride	7-Day Guideline Criterion		
Start Date	End Date	(μg/m ³ as HF at STP)					
1-Aug-24	5-Sep-24	0.018	0.006	0.024	1.7		
8-Aug-24	12-Sep-24	0.020	0.026	0.046	1.7		
14-Aug-24	19-Sep-24	0.051	0.200	0.251	1.7		
22-Aug-24	25-Sep-24	0.033	0.020	0.053	1.7		
29-Aug-24	3-Oct-24	0.034	0.197	0.231	1.7		
5-Sep-24	10-Oct-24	0.074	0.277	0.351	1.7		
12-Sep-24	17-Oct-24	0.030	0.332	0.362	1.7		
19-Sep-24	24-Oct-24	0.030	0.146	0.176	1.7		
25-Sep-24	31-Oct-24	0.030	0.144	0.174	1.7		
31-Oct-24	6-Nov-24	0.015	0.126	0.141	1.7		
6-Nov-24	14-Nov-24	0.020	0.318	0.338	1.7		
14-Nov-24	21-Nov-24	0.002	0.068	0.070	1.7		
21-Nov-24	28-Nov-24	0.011	0.041	0.052	1.7		

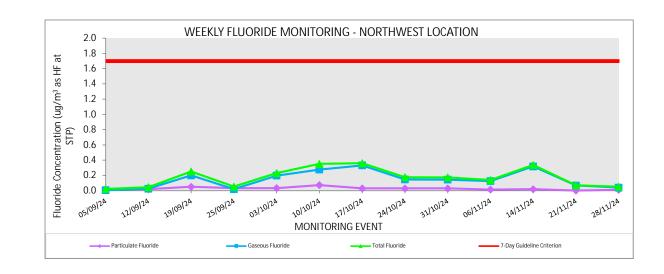


North West Monitoring Location - 24 hour Fluoride Monitoring

North West - 24 hour Fluoride Monitoring September 2024 to November 2024				
Monitoring Event	24-hr Particulate Fluoride	24-hr Gaseous Fluoride	24-hr Total Fluoride	24-hr Total Fluoride Guideline Criterion
	(μg/m ³ as HF at STP)			
02-Sep-24	-	-	-	2.9
08-Sep-24	0.014	0.057	0.071	2.9
11-Sep-24	0.014	0.029	0.043	2.9
14-Sep-24	0.028	0.073	0.101	2.9
20-Sep-24	0.014	0.036	0.050	2.9
26-Sep-24	0.027	0.394	0.421	2.9
02-Oct-24	0.013	0.171	0.184	2.9
08-Oct-24	0.028	0.853	0.881	2.9
14-Oct-24	0.015	0.215	0.230	2.9
20-Oct-24	-	-	-	2.9
26-Oct-24	0.014	0.290	0.304	2.9
30-Oct-24	0.015	0.074	0.089	2.9
01-Nov-24	0.015	0.259	0.274	2.9
07-Nov-24	0.016	0.140	0.156	2.9
13-Nov-24	0.015	0.201	0.216	2.9
19-Nov-24	0.014	0.120	0.134	2.9
25-Nov-24	0.015	0.096	0.111	2.9

24-h FLUORIDE MONITORING - NORTHWEST LOCATION 3.5 3.0 Fluoride Concentration (ug/m³ as HF at STP) 2.5 2.0 1.5 1.0 0.5 0.0 02109124 08109124 11/09/24 14/09/24 20109124 26109124 02/120/24 26/20/24 30/20/24 01/11/24 13/11/24 07/122/24 19/11/24 25/11/24 0812012A 20120 2012012A MONITORING EVENT 24-hr Particulate Fluoride 24-hr Total Fluoride Guideline Criterion


2 Sep sample failed to run. Catch up sample performed 11 Sep. 20 Oct sample failed to run. Catch up sample performed 30 Oct.


South East Monitoring Location - 24 hour PM10 Monitoring

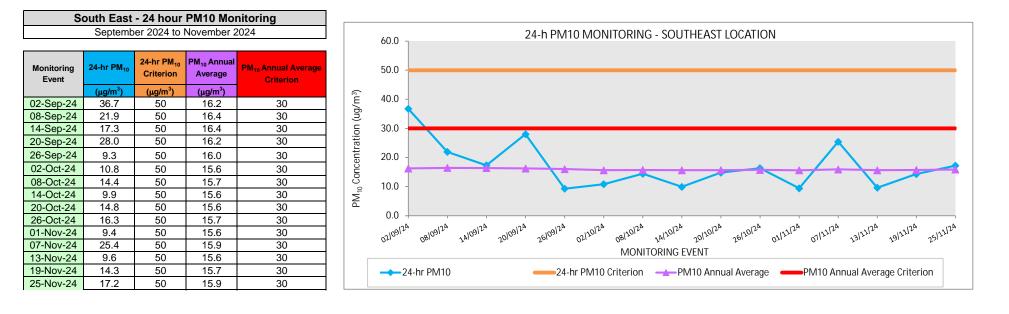



South East Monitoring Location - 7 Day Fluoride Monitoring


South East - 7 Day Fluoride Monitoring					
September 2024 to November 2024					
Monitoring Event		Particulate Fluoride Gaseous Fluoride		Total Fluoride	7-Day Guideline Criterion
Start Date	End Date	(μg/m ³ as HF at STP)	(μg/m ³ as HF at STP)	(μg/m ³ as HF at STP)	(µg/m ³ as HF at STP)
5-Sep-24	12-Sep-24	0.032	0.18	0.212	1.7
12-Sep-24	19-Sep-24	0.021	0.26	0.281	1.7
19-Sep-24	25-Sep-24	0.054	0.25	0.304	1.7
25-Sep-24	3-Oct-24	0.004	0.114	0.118	1.7
3-Oct-24	10-Oct-24	0.011	0.151	0.162	1.7
10-Oct-24	17-Oct-24	0.007	0.174	0.181	1.7
17-Oct-24	24-Oct-24	0.011	0.24	0.251	1.7
24-Oct-24	31-Oct-24	0.005	0.204	0.209	1.7
31-Oct-24	6-Nov-24	0.009	0.199	0.208	1.7
6-Nov-24	14-Nov-24	0.007	0.162	0.169	1.7
14-Nov-24	21-Nov-24	0.002	0.104	0.106	1.7
21-Nov-24	28-Nov-24	0.006	0.153	0.159	1.7

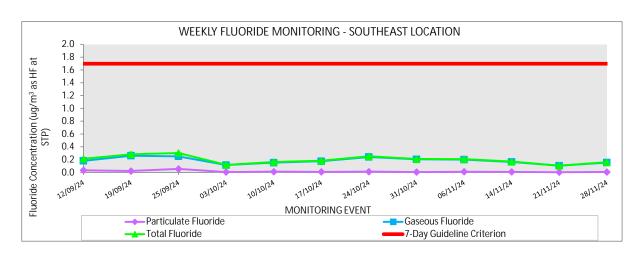

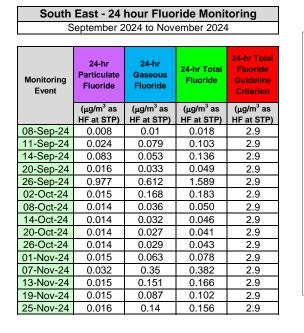


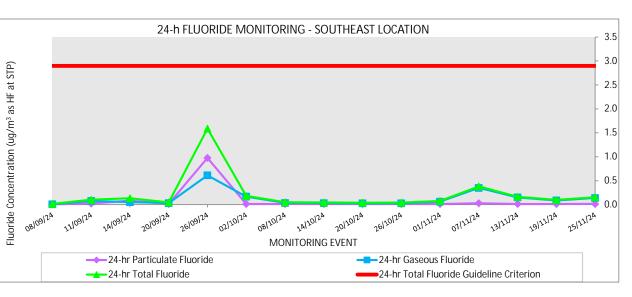

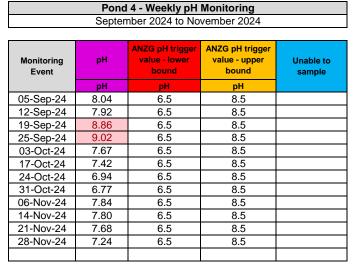

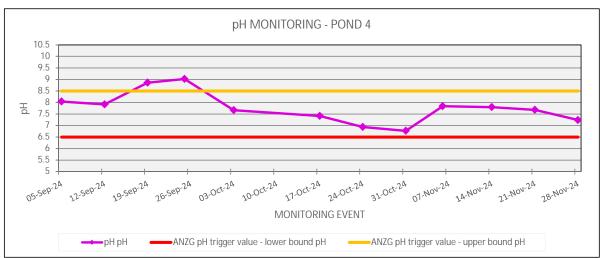



Pond 4 - Weekly EC Monitoring				
September 2024 to November 2024				
Monitoring Event	EC ANZG EC trigger value lower bound		ANZG EC trigger value - upper bound	Unable to sample
	µS/cm	μS/cm	μS/cm	
05-Sep-24	335	125	2200	
12-Sep-24	327	125	2200	
19-Sep-24	386	125	2200	
25-Sep-24	376	125	2200	
03-Oct-24	283	125	2200	
17-Oct-24	251	125	2200	
24-Oct-24	271	125	2200	
31-Oct-24	290	125	2200	
06-Nov-24	386	125	2200	
14-Nov-24	197	125	2200	
21-Nov-24	228	125	2200	
28-Nov-24	283	125	2200	

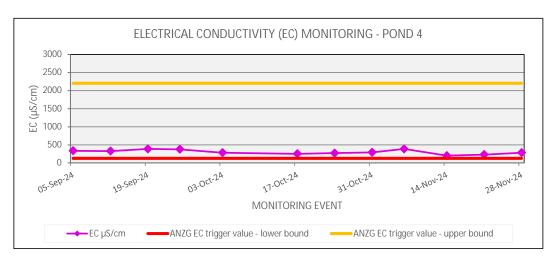


Pond 4 - Weekly Temperature Monitoring	
September 2024 to November 2024	

Monitoring Event	Temperature	Unable to sample
	°C	
05-Sep-24	20.4	
12-Sep-24	17.8	
19-Sep-24	20	
25-Sep-24	23.1	
03-Oct-24	22.7	
17-Oct-24	21.2	
24-Oct-24	22.1	
31-Oct-24	21.7	
06-Nov-24	28.3	
14-Nov-24	22.7	
21-Nov-24	24.0	
28-Nov-24	25.6	

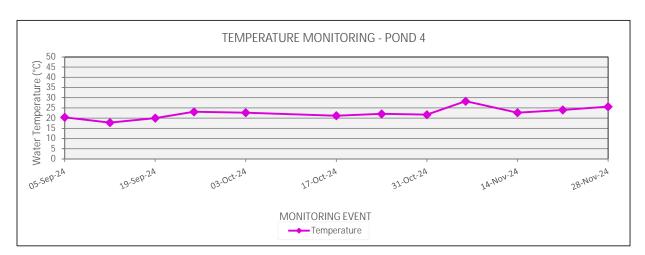

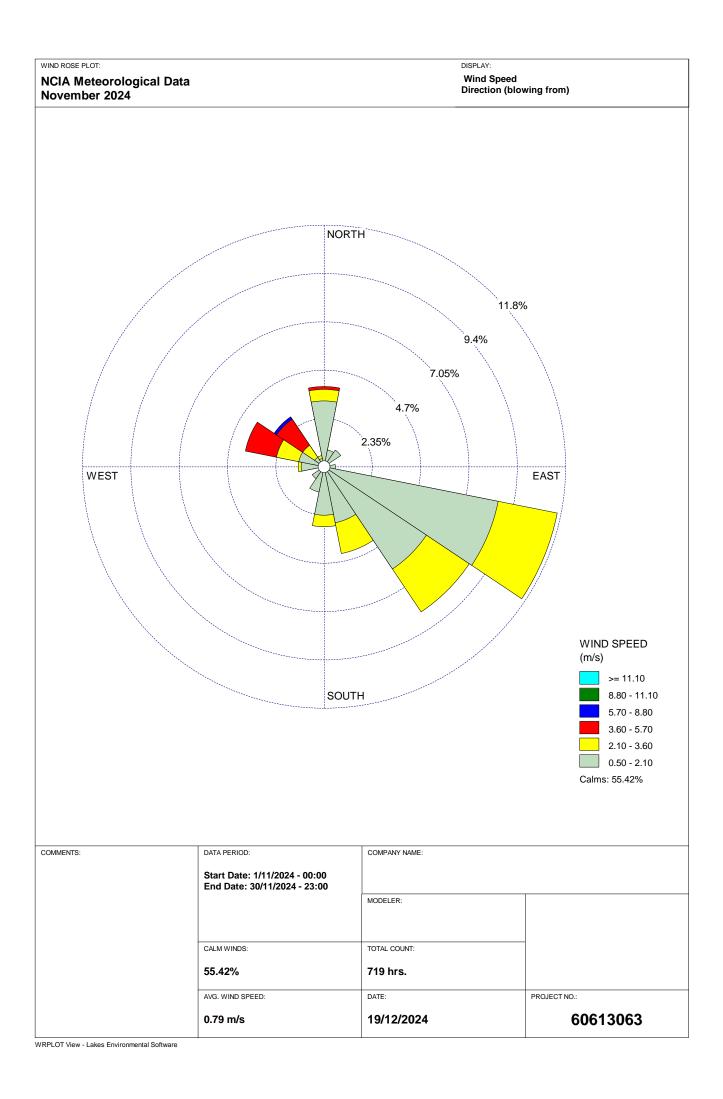

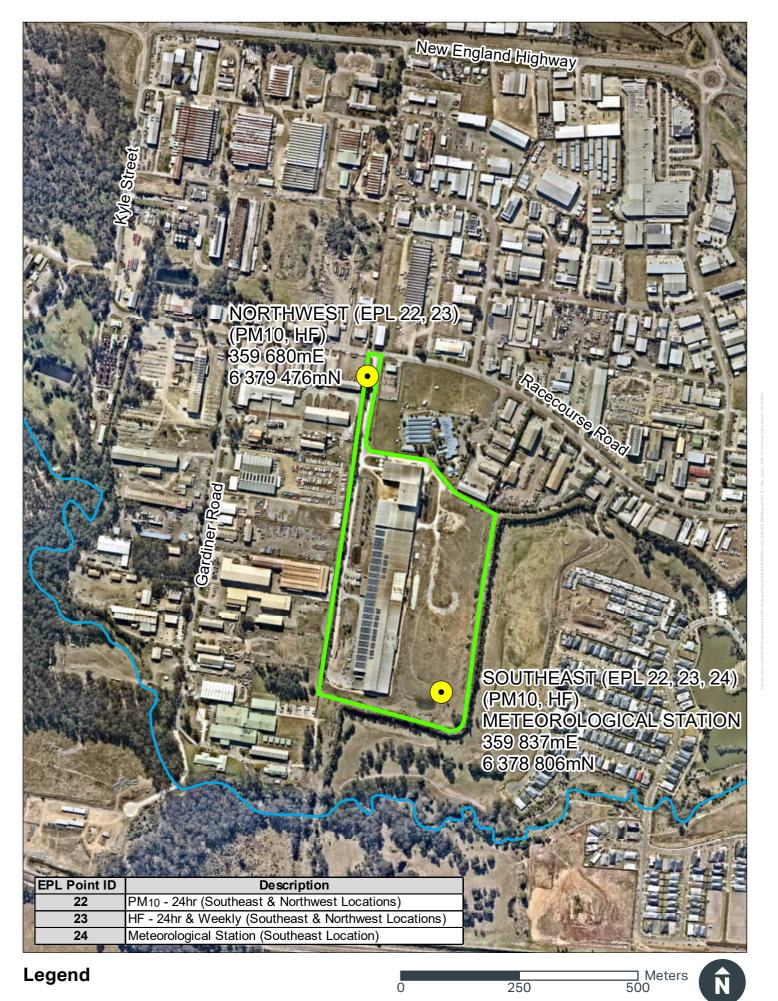



Ambient Air Monitoring Station





AECOM