

21 May 2025

Chris Schneider
Managing Director
National Ceramic Industries Australia
PO Box 765
Maitland NSW 2320

Dear Chris

Environmental Monitoring for National Ceramic Industries Australia - April 2025

Please find enclosed the documentation for the environmental monitoring carried out for National Ceramic Industries Australia during April 2025. Sampling methodology and adopted assessment criteria are detailed below.

1.0 Sampling Methodology

Sampling was performed by AECOM Australia Pty Ltd (AECOM) and sample analysis was carried out by ALS NATA accredited laboratory. All sampling and analysis were carried out in accordance with Environmental Protection Authority (EPA) approved methods with reference to the following Australian Standards:

- monitoring of fine suspended particulates (PM₁₀) on the EPA six-day cycle in accordance with:
 - *AS/NZS 3580.9.6 (2015) Methods for the Sampling and Analysis of Ambient Air – Determination of Suspended Particulate Matter – PM₁₀ High Volume Sampler with Size Selective Inlet – Gravimetric Method.*
- monitoring of fluorides in ambient air in accordance with:
 - *AS/NZS 3580.13.2 (2013) Determination of fluorides – Gaseous and acid-soluble particulate fluorides – Manual, double filter paper sampling.*
- meteorological monitoring in accordance with:
 - *AS 3580.1.1 (2016) – Methods for sampling and analysis of ambient air – Part 1.1 – Guide to siting air monitoring equipment.*
 - *AS 3580.14 (2014) – Methods for sampling and analysis of ambient air – Part 14: Meteorological monitoring for ambient air quality monitoring.*
- monitoring of surface water quality in accordance with:
 - *AS/NZS 5667.1:1998 (R2016) Guidance on the design of sampling programs, sampling techniques and the preservation and handling of samples.*
 - *AS/NZS 5667.4:1998 (R2016) Guidance on sampling from lakes, natural and manmade.*

2.0 Assessment Criteria

Suspended particulate loads are assessed against the impact assessment criteria defined in the Project Approval conditions (09_0006 – National Ceramic Industries Australia Tile Manufacturing Facility Expansion Project, 19 January 2012). The assessment criteria for PM₁₀ (particulate matter with an aerodynamic diameter of less than 10 µm) are:

- 50 µg/m³ over a 24-hour period
- 30 µg/m³ as an annual average.

Ambient fluoride concentrations are assessed against the guidelines defined in NSW EPA *Approved Methods for the Modelling and Assessment of Air Pollutants in New South Wales* (NSW EPA (2022)).

The NSW EPA impact assessment criteria for ambient fluoride are:

- 2.9 µg/m³ over a 24-hour period
- 1.7 µg/m³ over a 7-day period.

Surface waters are assessed in accordance with default trigger values for physical and chemical stressors for southeast Australia in the *Australian and New Zealand Guidelines for Fresh and Marine Water Quality* (ANZG, 2018). These values are:

- pH in the range of 6.5 - 8.5 (Table 3.3.2 - NSW Lowland River)
- electrical conductivity (EC) in the range of 125 – 2200 µS/cm (Table 3.3.3 - NSW Lowland River).

3.0 Monitoring Results

Monitoring results for the month of April 2025 are presented in the attachments to this letter. Monitoring results for the preceding two months are also presented to demonstrate quarterly trends in results.

The April 2025 monitoring results show that all ambient PM₁₀ results were below the short-term impact assessment criterion (50 µg/m³) as defined in the DPIE Project Approval (Schedule 3, Condition 15, Table 2).

The PM₁₀ rolling annual average concentration at the Southeast site remains below the Project Approval annual criterion of 30 µg/m³ with an average of 14.4 µg/m³ following the April monitoring period. The Northwest annual average is also below the criteria and is sitting at 19.5 µg/m³ following the completion of the April monitoring period.

Fluoride results for April remain below the relevant assessment criteria at both the Northwest and Southeast monitoring sites with no exceedances of either the 24-hour (2.9 µg/m³) or 7-day (1.7 µg/m³) criteria this month.

Pond 4, being the last detention pond on site before water potentially leaves the site is monitored for pH, Electrical Conductivity and Temperature on a weekly basis. The adopted ANZG 2018 guidelines for pH and conductivity are the default trigger values for slightly disturbed aquatic ecosystems in NSW lowland rivers.

pH measurements for April 2025 were within both the upper and lower limits of the adopted guidelines.

Electrical conductivity measurements for April were within both upper and lower limits of the adopted guidelines with the exception of the April 3 reading which was 109 µS/cm against the ANZG lower guideline of 125 µS/cm. The pond was not observed to be discharging on this day. Water temperature was also measured weekly however no guideline is available for assessment.

Pond 4 was observed to be flowing to offsite during site visits on 23 April and 1 May however parameters measured on these days were within the required ANZG guidelines.

A figure showing the monitoring locations and monitoring results and plots can be found attached along with the wind rose for April. Laboratory certificates, field sheets and calibration data along with relevant meteorology data can be provided on request.

If you require any further information, please contact Cyé Buckland on 0488 777 160.

Yours faithfully,




cye.buckland@aecom.com

Mobile: +61 488 777 160

encl: Monitoring data tables and charts, wind rose, monitoring locations

North West Monitoring Location - 24 hour PM10 Monitoring


North West - 24 hour PM10 Monitoring				
February 2025 to April 2025				
Monitoring Event	24-hr PM ₁₀	24-hr PM ₁₀ Criterion	PM ₁₀ Annual Average	PM ₁₀ Annual Average Criterion
	(µg/m ³)	(µg/m ³)	(µg/m ³)	
5-Feb-25	31.0	50	20.8	30
11-Feb-25	8.2	50	20.6	30
17-Feb-25	13.8	50	20.5	30
23-Feb-25	10.8	50	20.1	30
1-Mar-25	32.1	50	20.2	30
7-Mar-25	13.1	50	20.0	30
13-Mar-25	9.4	50	19.7	30
19-Mar-25	15.6	50	19.8	30
25-Mar-25	10.8	50	19.8	30
31-Mar-25	4.6	50	19.7	30
6-Apr-25	23.7	50	20.0	30
12-Apr-25	11.8	50	19.9	30
18-Apr-25	12.2	50	19.8	30
24-Apr-25	16.7	50	19.8	30
30-Apr-25	6.2	50	19.5	30

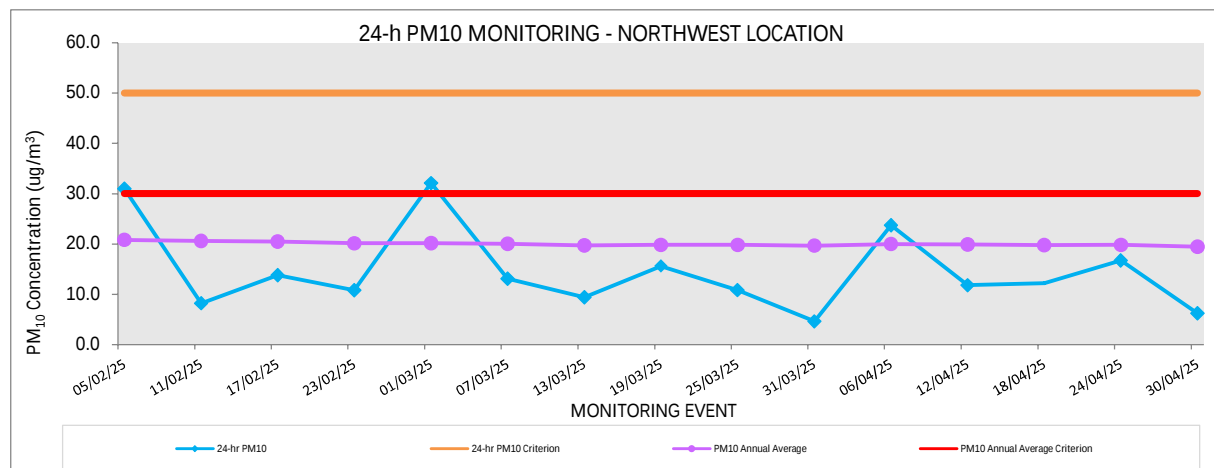

North West Monitoring Location - 7 Day Fluoride Monitoring

North West - 7 Day Fluoride Monitoring					
February 2025 to May 2025					


Monitoring Event		Particulate Fluoride	Gaseous Fluoride	Total Fluoride	7-Day Guideline Criterion
Start Date	End Date	($\mu\text{g}/\text{m}^3$ as HF at STP)	($\mu\text{g}/\text{m}^3$ as HF at STP)	($\mu\text{g}/\text{m}^3$ as HF at STP)	($\mu\text{g}/\text{m}^3$ as HF at STP)
6-Feb-25	13-Feb-25	0.013	0.162	0.175	1.7
13-Feb-25	20-Feb-25	0.026	0.065	0.091	1.7
20-Feb-25	27-Feb-25	0.021	0.361	0.382	1.7
27-Feb-25	6-Mar-25	0.019	0.501	0.520	1.7
6-Mar-25	13-Mar-25	0.002	0.126	0.128	1.7
13-Mar-25	20-Mar-25	0.031	0.100	0.131	1.7
20-Mar-25	27-Mar-25	0.009	0.095	0.104	1.7
27-Mar-25	3-Apr-25	0.008	0.073	0.081	1.7
3-Apr-25	10-Apr-25	0.016	0.039	0.055	1.7
10-Apr-25	17-Apr-25	0.022	0.144	0.166	1.7
17-Apr-25	23-Apr-25	0.005	0.049	0.054	1.7
23-Apr-25	1-May-25	0.033	0.091	0.124	1.7

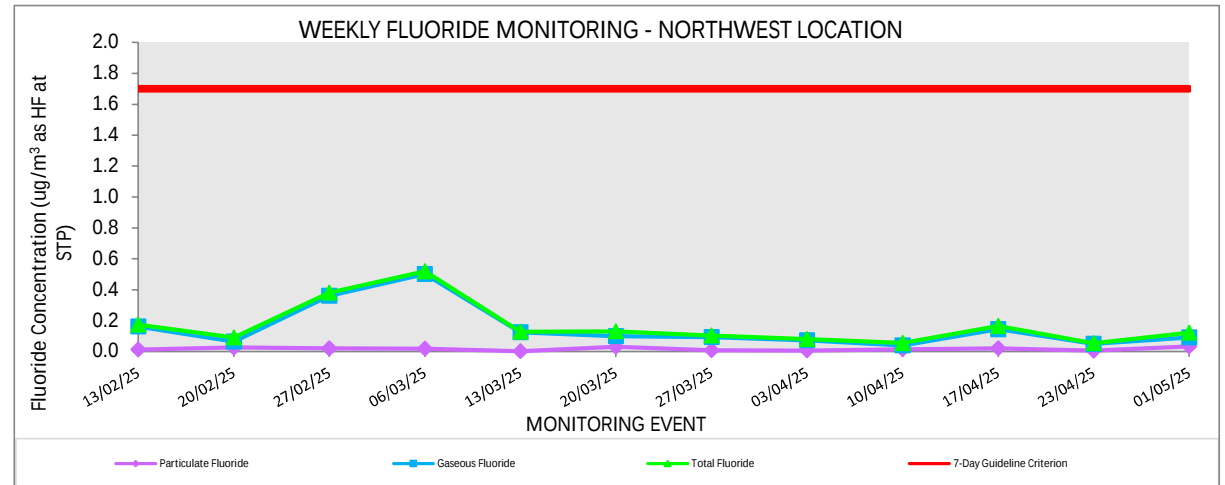

North West Monitoring Location - 24 hour Fluoride Monitoring


North West - 24 hour Fluoride Monitoring				
February 2025 to April 2025				
Monitoring Event	24-hr Particulate Fluoride	24-hr Gaseous Fluoride	24-hr Total Fluoride	24-hr Total Fluoride Guideline Criterion
	(µg/m³ as HF at STP)	(µg/m³ as HF at STP)	(µg/m³ as HF at STP)	(µg/m³ as HF at STP)
05-Feb-25	0.014	0.218	0.232	2.9
11-Feb-25	0.014	0.150	0.164	2.9
17-Feb-25	0.015	0.126	0.141	2.9
23-Feb-25	0.015	0.186	0.201	2.9
01-Mar-25	0.014	0.253	0.267	2.9
07-Mar-25	0.008	0.149	0.157	2.9
13-Mar-25	0.015	0.012	0.027	2.9
19-Mar-25	0.015	0.036	0.051	2.9
25-Mar-25	0.015	0.134	0.149	2.9
31-Mar-25	0.015	0.049	0.064	2.9
06-Apr-25	0.014	0.068	0.082	2.9
12-Apr-25	0.014	0.111	0.125	2.9
18-Apr-25	0.016	0.089	0.105	2.9
24-Apr-25	0.015	0.132	0.147	2.9
30-Apr-25	0.015	0.063	0.078	2.9

Note: Sample 7 March 2025 ran for 48 hours.

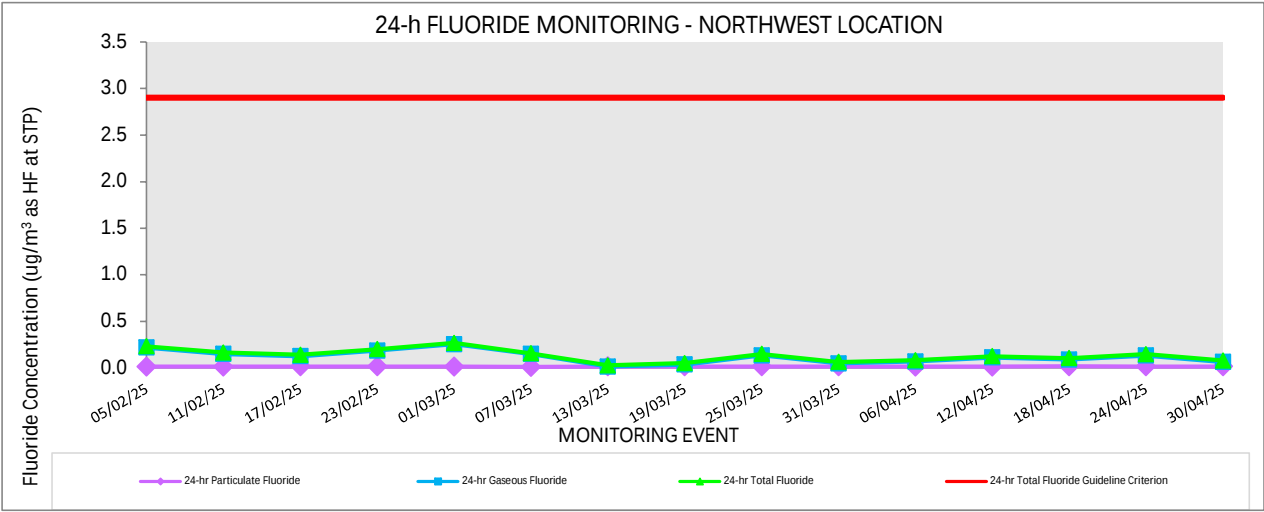

South East Monitoring Location - 24 hour PM10 Monitoring

South East - 24 hour PM10 Monitoring				
February 2025 to April 2025				
Monitoring Event	24-hr PM ₁₀	24-hr PM ₁₀ Criterion	PM ₁₀ Annual Average	PM ₁₀ Annual Average Criterion
	(µg/m ³)	(µg/m ³)	(µg/m ³)	
5-Feb-25	25.3	50	14.9	30
11-Feb-25	8.1	50	14.7	30
17-Feb-25	11.8	50	14.7	30
23-Feb-25	11.3	50	14.5	30
1-Mar-25	27.9	50	14.5	30
7-Mar-25	12.4	50	14.5	30
13-Mar-25	8.6	50	14.3	30
19-Mar-25	9.8	50	14.4	30
25-Mar-25	6.4	50	14.3	30
31-Mar-25	5.0	50	14.2	30
6-Apr-25	23.5	50	14.5	30
12-Apr-25	12.8	50	14.5	30
18-Apr-25	12.9	50	14.5	30
24-Apr-25	10.2	50	14.5	30
30-Apr-25	6.4	50	14.4	30

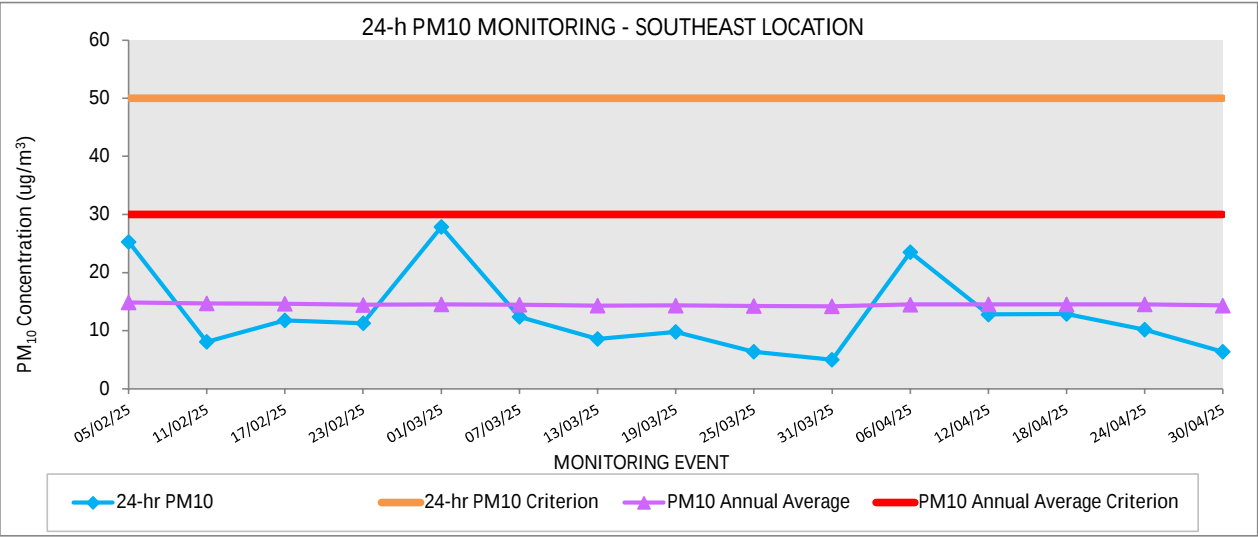


South East Monitoring Location - 7 Day Fluoride Monitoring

South East - 7 Day Fluoride Monitoring					
February 2025 to April 2025					


Monitoring Event		Particulate Fluoride	Gaseous Fluoride	Total Fluoride	7-Day Guideline Criterion
Start Date	End Date	($\mu\text{g}/\text{m}^3$ as HF at STP)	($\mu\text{g}/\text{m}^3$ as HF at STP)	($\mu\text{g}/\text{m}^3$ as HF at STP)	($\mu\text{g}/\text{m}^3$ as HF at STP)
6-Feb-25	13-Feb-25	0.002	0.123	0.125	1.7
13-Feb-25	20-Feb-25	0.005	0.129	0.134	1.7
20-Feb-25	27-Feb-25	0.016	0.183	0.199	1.7
27-Feb-25	6-Mar-25	0.002	0.173	0.175	1.7
6-Mar-25	12-Mar-25	0.002	0.102	0.104	1.7
18-Mar-25	20-Mar-25	0.008	0.159	0.167	1.7
20-Mar-25	27-Mar-25	0.002	0.08	0.082	1.7
27-Mar-25	3-Apr-25	0.002	0.081	0.083	1.7
3-Apr-25	10-Apr-25	0.013	0.117	0.130	1.7
10-Apr-25	17-Apr-25	0.006	0.107	0.113	1.7
17-Apr-25	23-Apr-25	0.005	0.093	0.098	1.7
23-Apr-25	1-May-25	0.027	0.106	0.133	1.7

Note: Pump not turned back on 12 March 2025. Run period 18-20 March 2025.

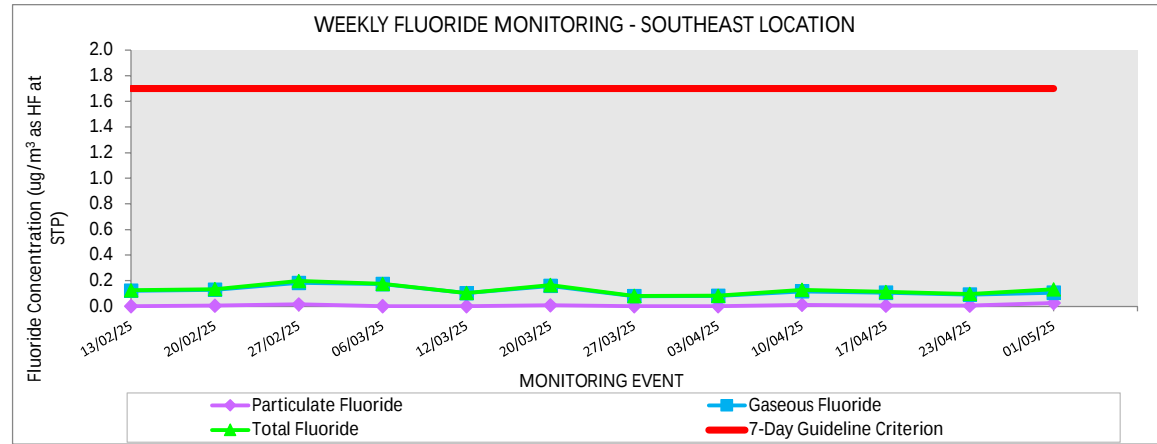

South East Monitoring Location - 24 hour Fluoride Monitoring


South East - 24 hour Fluoride Monitoring				
February 2025 to April 2025				
Monitoring Event	24-hr Particulate Fluoride	24-hr Gaseous Fluoride	24-hr Total Fluoride	24-hr Total Fluoride Guideline Criterion
	(µg/m³ as HF at STP)	(µg/m³ as HF at STP)	(µg/m³ as HF at STP)	(µg/m³ as HF at STP)
5-Feb-25	0.017	0.161	0.178	2.9
11-Feb-25	0.016	0.244	0.260	2.9
17-Feb-25	0.017	0.098	0.115	2.9
23-Feb-25	0.018	0.252	0.270	2.9
1-Mar-25	0.018	0.009	0.027	2.9
7-Mar-25	0.017	0.168	0.185	2.9
13-Mar-25	0.018	0.15	0.168	2.9
19-Mar-25	0.018	0.148	0.166	2.9
25-Mar-25	0.018	0.06	0.078	2.9
31-Mar-25	0.018	0.009	0.027	2.9
6-Apr-25	0.017	0.009	0.026	2.9
12-Apr-25	0.018	0.186	0.204	2.9
18-Apr-25	0.01	0.097	0.107	2.9
24-Apr-25	0.019	0.232	0.251	2.9
30-Apr-25	0.036	0.096	0.132	2.9

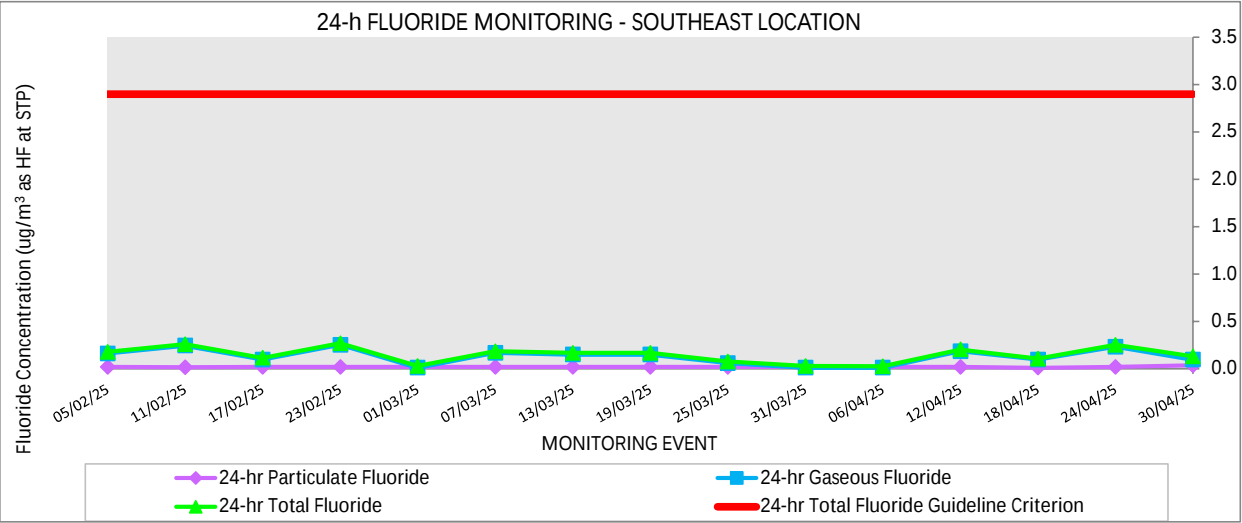

Pond 4 - Weekly pH Monitoring

February 2025 to May 2025


Monitoring Event	pH	ANZG pH trigger value - lower bound	ANZG pH trigger value - upper bound	Unable to sample
	pH	pH	pH	
06-Feb-25	7.55	6.5	8.5	
13-Feb-25	8.21	6.5	8.5	
20-Feb-25	8.04	6.5	8.5	
27-Feb-25	7.24	6.5	8.5	
06-Mar-25	6.59	6.5	8.5	
12-Mar-25	6.78	6.5	8.5	
18-Mar-25	7.66	6.5	8.5	
20-Mar-25	7.08	6.5	8.5	
27-Mar-25	7.21	6.5	8.5	
03-Apr-25	7.35	6.5	8.5	
10-Apr-25	7.89	6.5	8.5	
17-Apr-25	7.27	6.5	8.5	
23-Apr-25	7.34	6.5	8.5	
01-May-25	7.43	6.5	8.5	

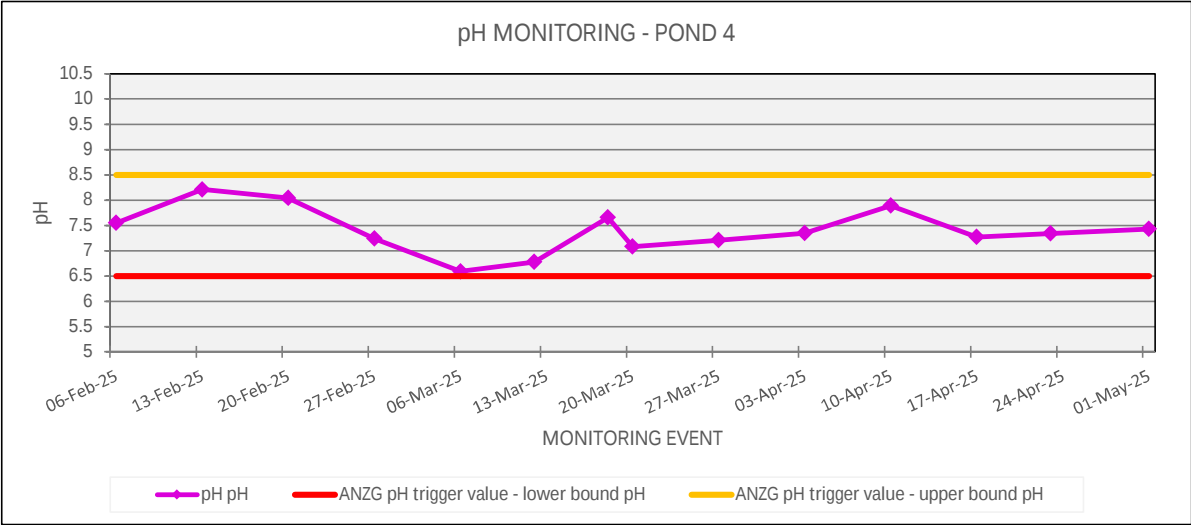

Pond 4 - Weekly EC Monitoring				
February 2025 to April 2025				


Monitoring Event	EC	ANZG EC trigger value - lower bound	ANZG EC trigger value - upper bound	Unable to sample
	µS/cm	µS/cm	µS/cm	
06-Feb-25	321	125	2200	
13-Feb-25	356	125	2200	
20-Feb-25	381	125	2200	
27-Feb-25	238	125	2200	
06-Mar-25	384	125	2200	
12-Mar-25	402	125	2200	
18-Mar-25	408	125	2200	
20-Mar-25	423	125	2200	
27-Mar-25	284	125	2200	
03-Apr-25	109	125	2200	
10-Apr-25	274	125	2200	
17-Apr-25	282	125	2200	
23-Apr-25	286	125	2200	
01-May-25		125	2200	

No EC recorded for 1 May

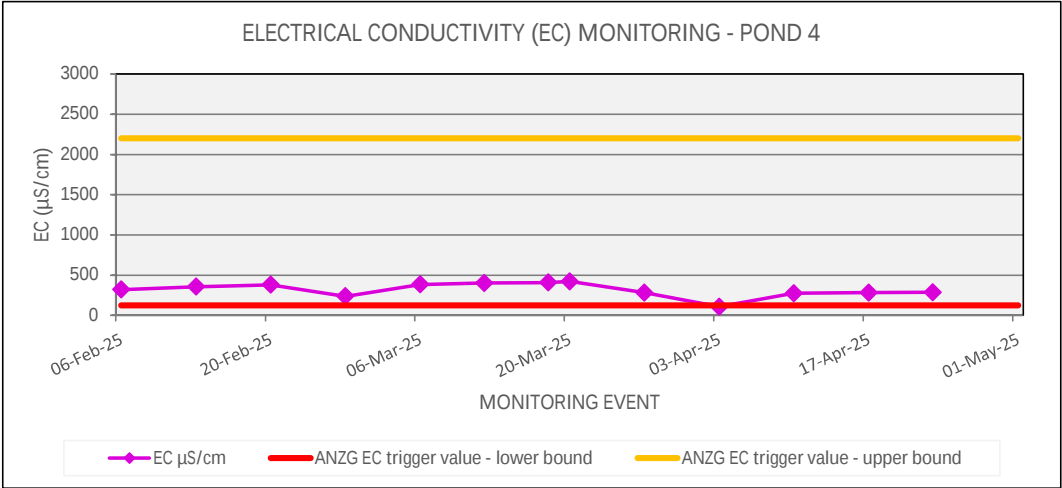

Pond 4 - Weekly Temperature Monitoring
February 2025 to May 2025

Monitoring Event	Temperature	Unable to sample
	°C	
06-Feb-25	26.6	
13-Feb-25	25.5	
20-Feb-25	24.2	
27-Feb-25	24.6	
06-Mar-25	18.4	
12-Mar-25	19.3	
18-Mar-25	25.5	
20-Mar-25	24.0	
27-Mar-25	24.1	
03-Apr-25	22.2	
10-Apr-25	23.4	
17-Apr-25	20.8	
23-Apr-25	26.6	
01-May-25	19.5	

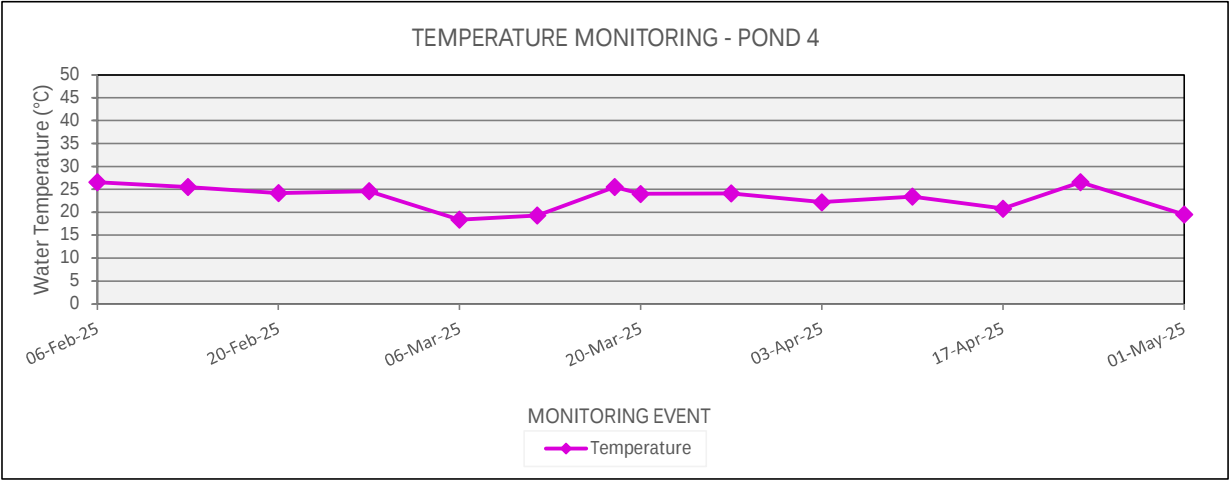


WIND ROSE PLOT:


NCIA Meteorological Data
April 2025

DISPLAY:

Wind Speed
Direction (blowing from)

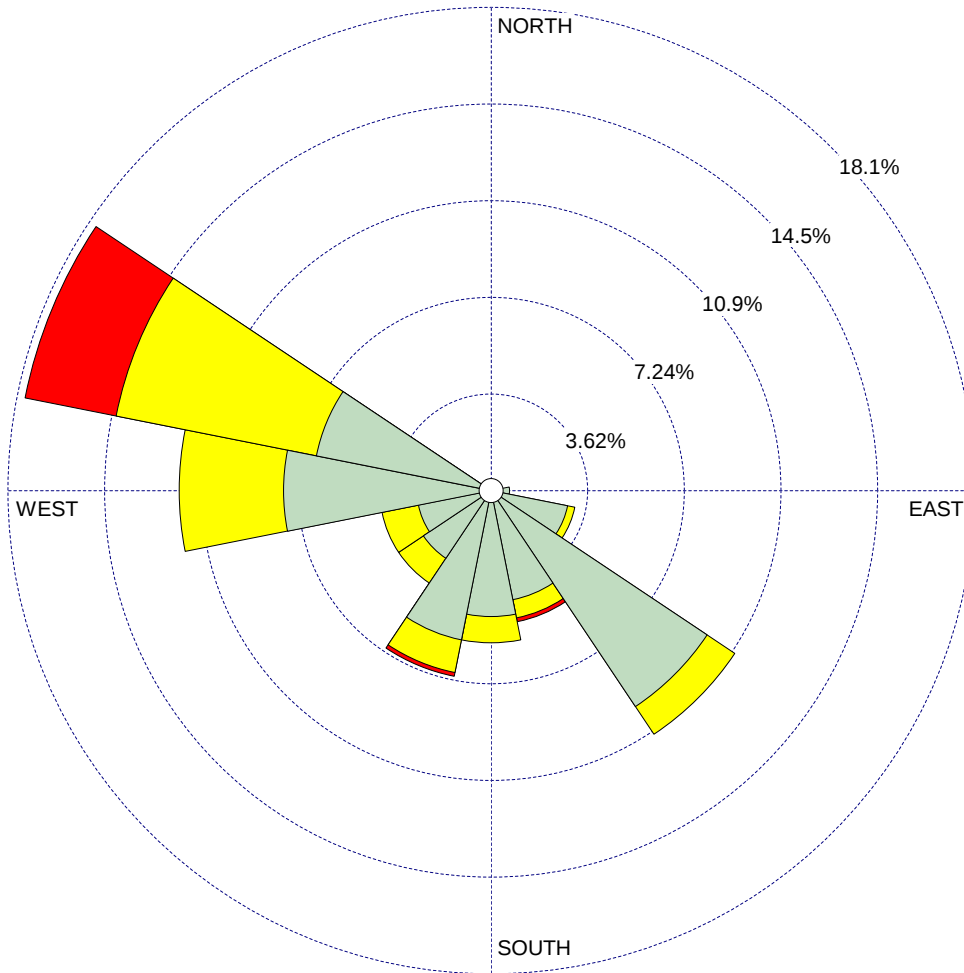

WIND SPEED
(m/s)



Calms: 28.85%

COMMENTS:

DATA PERIOD:

Start Date: 1/04/2025 - 00:00
End Date: 30/04/2025 - 23:00

COMPANY NAME:

MODELER:

CALM WINDS:

28.85%

TOTAL COUNT:

720 hrs.

AVG. WIND SPEED:

1.28 m/s

DATE:

21/05/2025

PROJECT NO.:

60613063



Legend

 Ambient Air Monitoring Station

 NCIA Site Boundary

 Watercourse

0 250 500 Meters



AECOM

Source: Imagery © Nearmap 2021