

22 July 2019

Chris Schneider  
Managing Director  
National Ceramic Industries Australia  
PO Box 765  
Maitland NSW 2320

Dear Chris,

### **Environmental Monitoring for National Ceramic Industries Australia - June 2019**

Please find enclosed the documentation for the environmental monitoring carried out for National Ceramic Industries Australia during June 2019. Sampling methodology and adopted assessment criteria are detailed below.

#### **1.0 Sampling Methodology**

Sampling was performed by AECOM Australia Pty Ltd (AECOM) and sample analysis was carried out by ALS NATA accredited laboratory. All sampling and analysis was carried out in accordance with Environmental Protection Authority (EPA) approved methods with reference to the following Australian Standards:

- Monitoring of fine suspended particulates (PM<sub>10</sub>) on the EPA six day cycle in accordance with:
  - AS/NZS 3580.9.6 (2015) Methods for the Sampling and Analysis of Ambient Air – Determination of Suspended Particulate Matter – PM<sub>10</sub> High Volume Sampler with Size Selective Inlet - Gravimetric Method.
- Monitoring of fluorides in ambient air in accordance with:
  - AS/NZS 3580.13.2 (2013) Determination of fluorides—Gaseous and acid-soluble particulate fluorides—Manual, double filter paper sampling.
- Meteorological monitoring in accordance with:
  - AS 3580.1.1 (2016) – *Methods for sampling and analysis of ambient air – Part 1.1 – Guide to siting air monitoring equipment; and*
  - AS 3580.14 (2014) – *Methods for sampling and analysis of ambient air – Part 14: Meteorological monitoring for ambient air quality monitoring.*
- Monitoring of surface water quality in accordance with:
  - AS/NZS 5667.1:1998(R2016) *Guidance on the design of sampling programs, sampling techniques and the preservation and handling of samples; and*
  - AS/NZS 5667.4:1998(R2016) *Guidance on sampling from lakes, natural and manmade.*

#### **2.0 Assessment Criteria**

Suspended particulate loads are assessed against the impact assessment criteria defined in the Project Approval conditions (09\_0006 – National Ceramic Industries Australia Tile Manufacturing Facility Expansion Project, 19 January 2012). The assessment criteria for PM<sub>10</sub> (particulate matter with an aerodynamic diameter of less than 10 µm) are:

- 50 µg/m<sup>3</sup> over a 24-hour period; and
- 30 µg/m<sup>3</sup> as an annual average.

Ambient fluoride concentrations are assessed against the guidelines defined in NSW EPA *Approved Methods for the Modelling and Assessment of Air Pollutants in New South Wales* (NSW EPA (2016)). The NSW EPA impact assessment criteria for ambient fluoride are:

- 2.9 µg/m<sup>3</sup> over a 24-hour period; and

- 1.7  $\mu\text{g}/\text{m}^3$  over a 7-day period.

Surface waters are assessed in accordance with default trigger values for physical and chemical stressors for southeast Australia in the *Australian and New Zealand Guidelines for Fresh and Marine Water Quality* (ANZG, 2018). These values are:

- pH in the range of 6.5 - 8.5 (Table 3.3.2 - NSW Lowland River); and
- Electrical conductivity (EC) in the range of 125 – 2200  $\mu\text{S}/\text{cm}$  (Table 3.3.3 - NSW Lowland River).

### 3.0 Monitoring Results

Monitoring results for the month of June 2019 are presented in the attachments to this letter. Monitoring results for the preceding two months are also presented to demonstrate quarterly trends in results.

June  $\text{PM}_{10}$  monitoring results were below the consent 24 hour criterion of  $50\mu\text{g}/\text{m}^3$ .

The  $\text{PM}_{10}$  rolling annual average concentration at the South East site remains below the Project Approval annual criterion of  $30\mu\text{g}/\text{m}^3$  with an average of  $21.7\mu\text{g}/\text{m}^3$  recorded. The North West annual average is currently above the criteria, sitting at  $33.6\mu\text{g}/\text{m}^3$  following the completion of the June monitoring period. This is primarily due to elevated results recorded during July 2018 and February 2019.

Fluoride results for June remain below the relevant assessment criteria at both the North West and South East monitoring sites with no exceedances of either the 24 hour or 7 day criteria this month.

The adopted ANZG 2018 guidelines for pH and conductivity are the default trigger values for slightly disturbed aquatic ecosystems in NSW lowland rivers. The pH measurement on 6 June was within the ANZG guideline with all remaining samples recorded above the ANZG guidelines however Pond 4 was not observed to be discharging at these times. All conductivity measurements were within the relevant ANZG guidelines for June. Water temperature was also measured weekly however no guideline is available for assessment. Pond 4 was not observed to be discharging during any of the June site visits.


The monitoring locations, monitoring results and plots can be found attached including the wind rose for June. Laboratory certificates, field sheets and calibration data along with relevant meteorology data can be provided on request.

If you require any further information, please contact Simon Murphy on 0428 626 952.

Yours faithfully,



James Enright  
Scientist – Compliance Services  
james.enright@aecom.com



Paul Wenta  
Principal Scientist - Air Quality  
paul.wenta@aecom.com

Direct Dial: +T +61 2 4911 4900  
Direct Fax: +F +61 2 4911 4999

Mobile: +61 438 670 281  
Direct Dial: +61 2 4911 4855  
Direct Fax: +61 2 4911 4999

encl: Monitoring data tables and charts, monitoring locations, wind rose

AECOM in Australia and New Zealand is certified to ISO9001, ISO14001 AS/NZS4801 and OHSAS18001.


© AECOM Australia Pty Ltd (AECOM). All rights reserved.

AECOM has prepared this document for the sole use of the Client and for a specific purpose, each as expressly stated in the document. No other party should rely on this document without the prior written consent of AECOM. AECOM undertakes no duty, nor accepts any responsibility, to any third party who may rely upon or use this document. This document has been prepared based on the Client's description of its requirements and AECOM's experience, having regard to assumptions that AECOM can reasonably be expected to make in accordance with sound professional principles. AECOM may also have relied upon information provided by the Client and other third parties to prepare this document, some of which may not have been verified. Subject to the above conditions, this document may be transmitted, reproduced or disseminated only in its entirety.

### North West Monitoring Location - 24 hour PM10 Monitoring

North West - 24 hour PM10 Monitoring				
April 2019 to June 2019				
Monitoring Event	24-hr PM <sub>10</sub>	24-hr PM <sub>10</sub> Criterion	PM <sub>10</sub> Annual Average	PM <sub>10</sub> Annual Average Criterion
	(µg/m <sup>3</sup> )	(µg/m <sup>3</sup> )	(µg/m <sup>3</sup> )	
2-Apr-19	11.0	50	<b>31.7</b>	30
8-Apr-19	<b>59.7</b>	50	<b>32.2</b>	30
14-Apr-19	22.7	50	<b>31.2</b>	30
20-Apr-19	16.7	50	<b>31.0</b>	30
26-Apr-19	42.2	50	<b>31.5</b>	30
2-May-19	35.2	50	<b>31.7</b>	30
8-May-19	48.0	50	<b>32.0</b>	30
14-May-19	32.6	50	<b>32.3</b>	30
20-May-19	40.4	50	<b>32.5</b>	30
26-May-19	<b>58.3</b>	50	<b>33.0</b>	30
1-Jun-19	24.3	50	<b>32.8</b>	30
7-Jun-19	20.3	50	<b>33.0</b>	30
13-Jun-19	42.6	50	<b>33.4</b>	30
19-Jun-19	17.6	50	<b>33.4</b>	30
25-Jun-19	38.9	50	<b>33.6</b>	30


\*Bold denotes exceedance

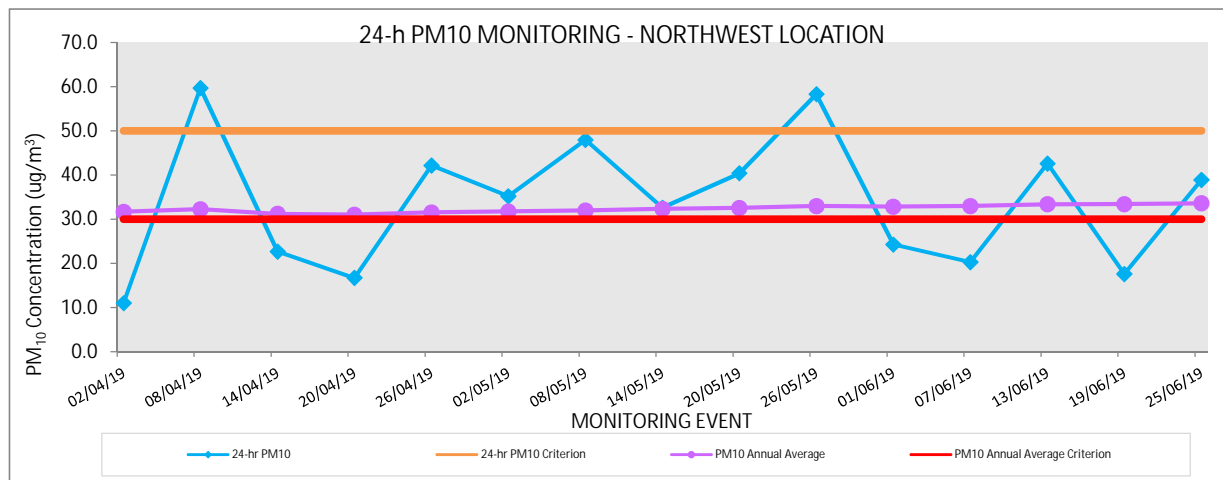

### North West Monitoring Location - 7 Day Fluoride Monitoring

North West - 7 Day Fluoride Monitoring	
April 2019 to June 2019	


Monitoring Event		Particulate Fluoride	Gaseous Fluoride	Total Fluoride	7-Day Guideline Criterion
Start Date	End Date	( $\mu\text{g}/\text{m}^3$ as HF at STP)	( $\mu\text{g}/\text{m}^3$ as HF at STP)	( $\mu\text{g}/\text{m}^3$ as HF at STP)	( $\mu\text{g}/\text{m}^3$ as HF at STP)
4-Apr-19	11-Apr-19	0.001	0.037	0.038	1.7
11-Apr-19	17-Apr-19	0.030	0.229	0.259	1.7
17-Apr-19	24-Apr-19	0.017	0.124	0.141	1.7
24-Apr-19	1-May-19	0.030	0.078	0.108	1.7
1-May-19	9-May-19	0.003	0.091	0.094	1.7
9-May-19	16-May-19	0.020	0.047	0.067	1.7
16-May-19	23-May-19	0.025	0.057	0.082	1.7
23-May-19	30-May-19	0.031	0.037	0.068	1.7
30-May-19	6-Jun-19	0.012	0.061	0.073	1.7
6-Jun-19	12-Jun-19	0.018	0.028	0.046	1.7
12-Jun-19	20-Jun-19	0.016	0.030	0.046	1.7
20-Jun-19	27-Jun-19	0.024	0.058	0.082	1.7

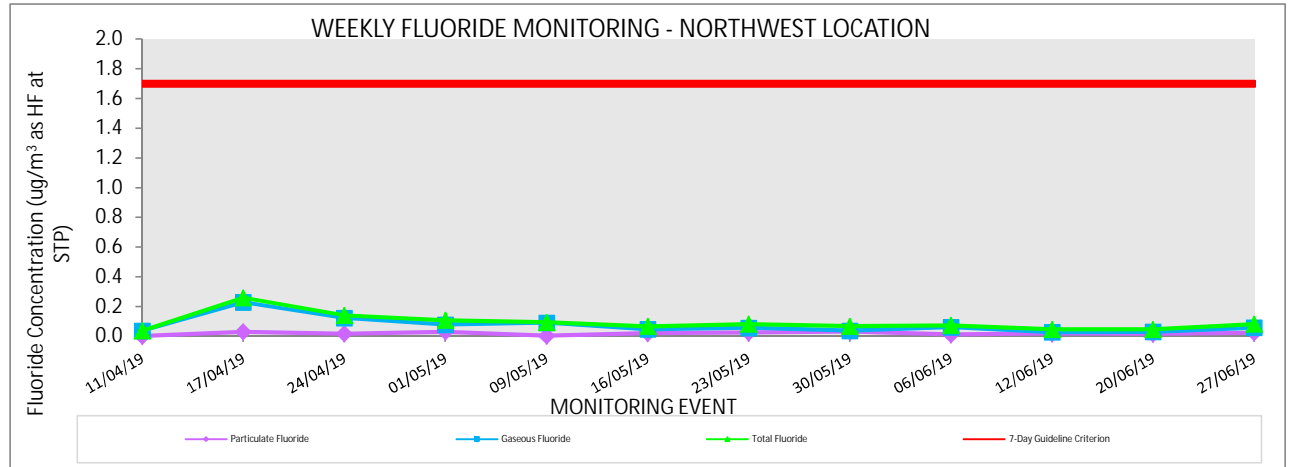

### North West Monitoring Location - 24 hour Fluoride Monitoring

**North West - 24 hour Fluoride Monitoring**  
April 2019 to June 2019

Monitoring Event	24-hr Particulate Fluoride	24-hr Gaseous Fluoride	24-hr Total Fluoride	24-hr Total Fluoride Guideline Criterion
	( $\mu\text{g}/\text{m}^3$ as HF at STP)	( $\mu\text{g}/\text{m}^3$ as HF at STP)	( $\mu\text{g}/\text{m}^3$ as HF at STP)	( $\mu\text{g}/\text{m}^3$ as HF at STP)
2-Apr-19	0.012	0.211	0.223	2.9
8-Apr-19	0.026	0.091	0.117	2.9
14-Apr-19	0.016	0.213	0.229	2.9
20-Apr-19	0.026	0.337	0.363	2.9
26-Apr-19	0.026	0.157	0.183	2.9
2-May-19	0.018	0.098	0.116	2.9
8-May-19	0.015	0.062	0.077	2.9
14-May-19	0.015	0.061	0.076	2.9
20-May-19	0.015	0.087	0.102	2.9
26-May-19	0.015	0.038	0.053	2.9
1-Jun-19	0.015	0.236	0.251	2.9
7-Jun-19	0.015	0.037	0.052	2.9
13-Jun-19	0.016	0.016	0.032	2.9
19-Jun-19	0.014	0.057	0.071	2.9
25-Jun-19	0.016	0.299	0.315	2.9

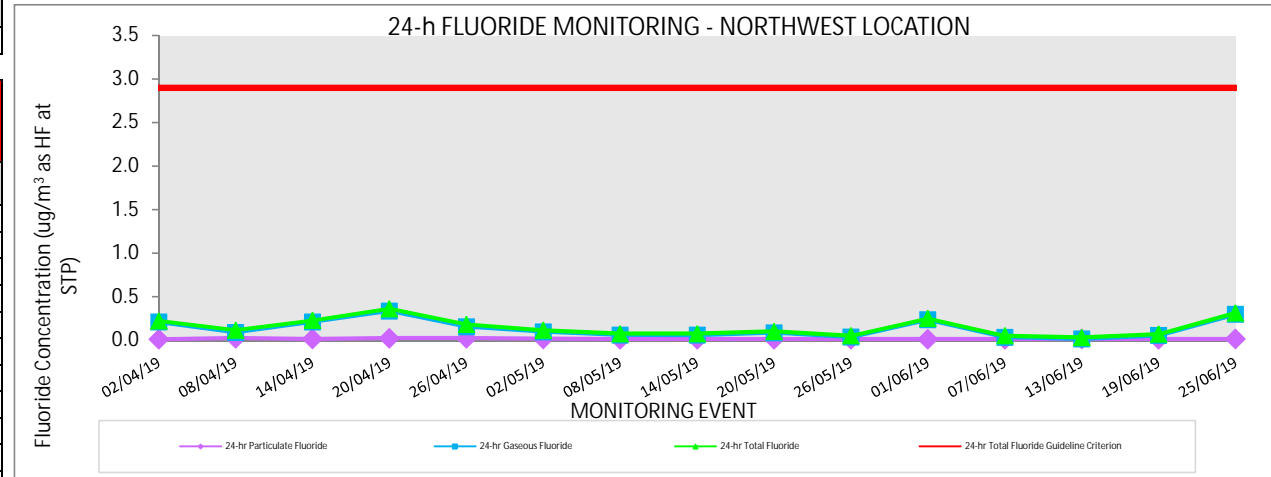


### South East Monitoring Location - 24 hour PM10 Monitoring

**South East - 24 hour PM10 Monitoring**  
April 2019 to June 2019

Monitoring Event	24-hr PM <sub>10</sub>	24-hr PM <sub>10</sub> Criterion	PM <sub>10</sub> Annual Average	PM <sub>10</sub> Annual Average Criterion
	(µg/m <sup>3</sup> )	(µg/m <sup>3</sup> )	(µg/m <sup>3</sup> )	
2-Apr-19	7.6	50	21.1	30
8-Apr-19	35.8	50	21.4	30
14-Apr-19	16.8	50	20.8	30
20-Apr-19	12.7	50	20.7	30
26-Apr-19	31.3	50	21.0	30
02/05/19	19.8	50	21.1	30
08/05/19	26.2	50	21.2	30
14/05/19	22.4	50	21.4	30
20/05/19	22.2	50	21.4	30
26/05/19*	-	50	21.4	30
01/06/19	26.5	50	21.0	30
07/06/19	16.8	50	21.2	30
13/06/19	22.1	50	21.4	30
19/06/19	12.2	50	21.6	30
21/06/19	16.8	50	21.6	30
25/06/19	7.9	50	21.7	30


\*Sample lost in severe winds

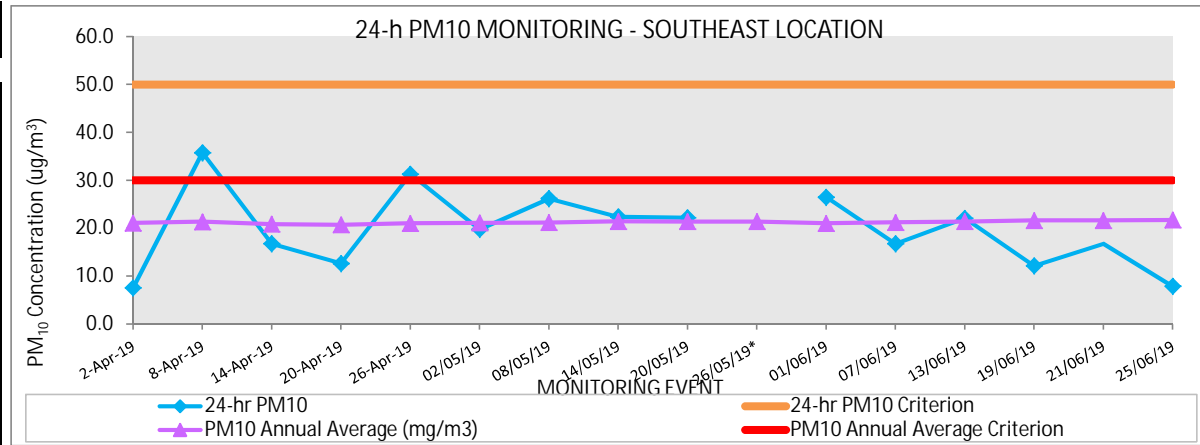

### South East Monitoring Location - 7 Day Fluoride Monitoring

**South East - 7 Day Fluoride Monitoring**  
April 2019 to June 2019


Monitoring Event		Particulate Fluoride	Gaseous Fluoride	Total Fluoride	7-Day Guideline Criterion
Start Date	End Date	( $\mu\text{g}/\text{m}^3$ as HF at STP)	( $\mu\text{g}/\text{m}^3$ as HF at STP)	( $\mu\text{g}/\text{m}^3$ as HF at STP)	( $\mu\text{g}/\text{m}^3$ as HF at STP)
4-Apr-19	11-Apr-19	0.025	0.286	0.311	1.7
11-Apr-19	17-Apr-19	0.006	0.103	0.109	1.7
17-Apr-19	24-Apr-19	0.003	0.149	0.152	1.7
24-Apr-19	1-May-19	0.017	0.200	0.217	1.7
1-May-19	9-May-19	0.024	0.157	0.181	1.7
9-May-19	16-May-19	0.013	0.171	0.184	1.7
16-May-19	23-May-19	0.022	0.201	0.223	1.7
23-May-19	30-May-19	0.036	0.029	0.065	1.7
30-May-19	6-Jun-19	0.012	0.065	0.077	1.7
6-Jun-19	12-Jun-19	0.012	0.143	0.155	1.7
12-Jun-19	20-Jun-19	0.016	0.067	0.083	1.7
20-Jun-19	27-Jun-19	0.008	0.189	0.197	1.7

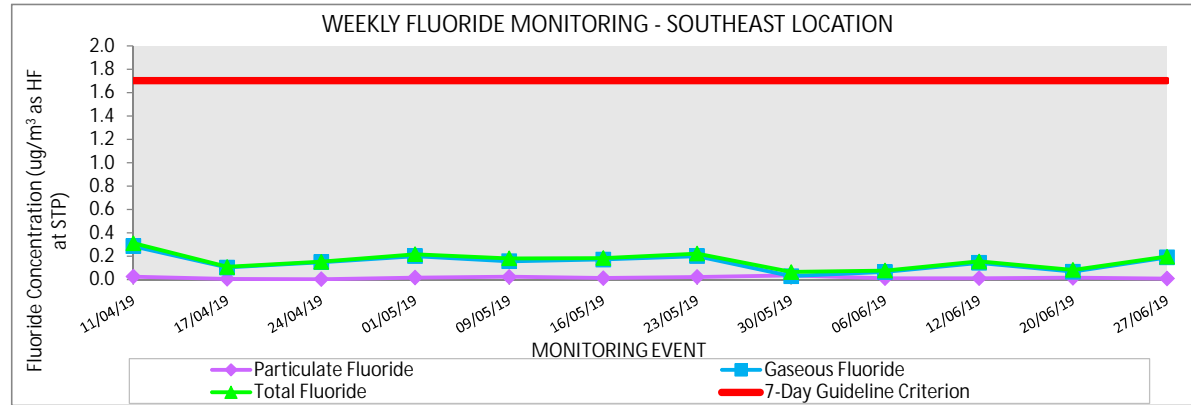

### South East Monitoring Location - 24 hour Fluoride Monitoring

**South East - 24 hour Fluoride Monitoring**  
April 2019 to June 2019


Monitoring Event	24-hr Particulate Fluoride	24-hr Gaseous Fluoride	24-hr Total Fluoride	24-hr Total Fluoride Guideline Criterion
	( $\mu\text{g}/\text{m}^3$ as HF at STP)	( $\mu\text{g}/\text{m}^3$ as HF at STP)	( $\mu\text{g}/\text{m}^3$ as HF at STP)	( $\mu\text{g}/\text{m}^3$ as HF at STP)
2-Apr-19	0.013	0.111	0.124	2.9
8-Apr-19	0.013	0.175	0.188	2.9
14-Apr-19	0.017	0.195	0.212	2.9
20-Apr-19	0.020	0.297	0.317	2.9
26-Apr-19	0.044	0.328	0.372	2.9
2-May-19	0.022	0.190	0.212	2.9
8-May-19	0.041	0.108	0.149	2.9
14-May-19	0.019	0.236	0.255	2.9
20-May-19	0.021	0.197	0.218	2.9
26-May-19	0.083	0.479	0.562	2.9
1-Jun-19	0.021	0.700	0.721	2.9
7-Jun-19	0.022	0.199	0.221	2.9
13-Jun-19	0.023	0.133	0.156	2.9
19-Jun-19	0.021	0.088	0.109	2.9
25-Jun-19	0.043	0.708	0.751	2.9

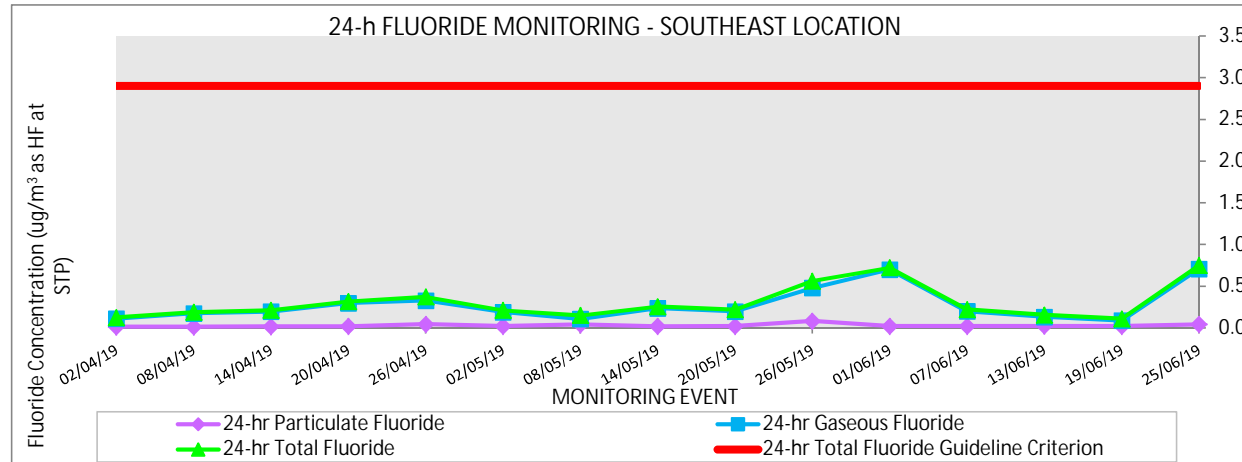




### Pond 4 Monitoring Location - Weekly pH Monitoring

<b>Pond 4 - Weekly pH Monitoring</b>				
April 2019 to June 2019				
Monitoring Event	pH	ANZECC pH trigger value - lower bound	ANZECC pH trigger value - upper bound	Unable to Sample
	pH	pH	pH	
4-Apr-19	9.00	6.5	8.5	
11-Apr-19	6.80	6.5	8.5	
17-Apr-19	8.40	6.5	8.5	
24-Apr-19	8.40	6.5	8.5	
1-May-19	9.30	6.5	8.5	
9-May-19	7.40	6.5	8.5	
16-May-19	9.50	6.5	8.5	
23-May-19	10.30	6.5	8.5	
30-May-19	9.50	6.5	8.5	
6-Jun-19	8.30	6.5	8.5	
12-Jun-19	8.70	6.5	8.5	
20-Jun-19	8.85	6.5	8.5	
27-Jun-19	8.72	6.5	8.5	

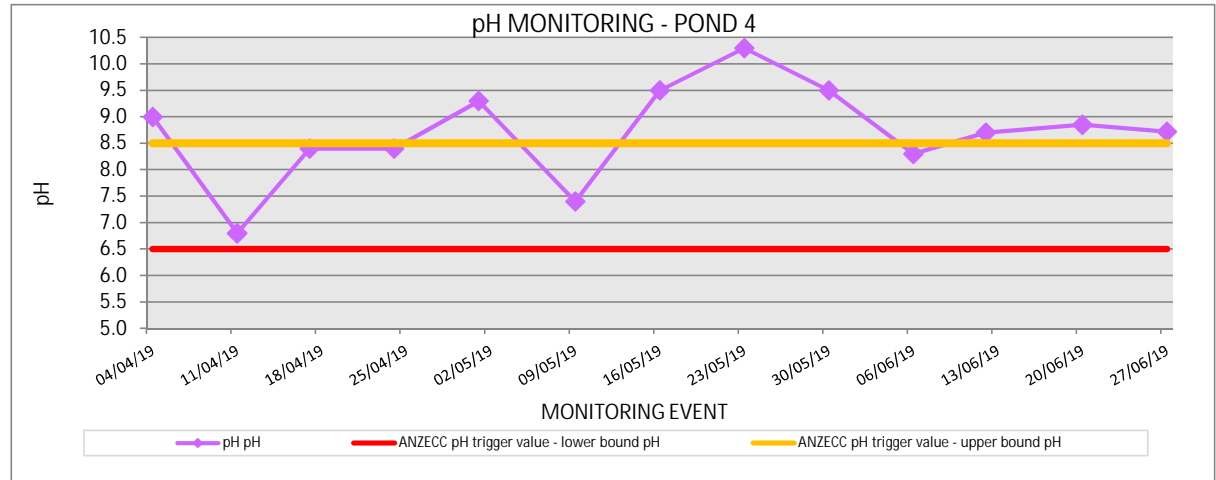

### Pond 4 Monitoring Location - Weekly EC Monitoring


Pond 4 - Weekly EC Monitoring				
April 2019 to June 2019				
Monitoring Event	EC	ANZECC EC trigger value - lower bound	ANZECC EC trigger value - upper bound	Unable to Sample
	µS/cm	µS/cm	µS/cm	
4-Apr-19	309	125	2200	
11-Apr-19	375	125	2200	
17-Apr-19	435	125	2200	
24-Apr-19	433	125	2200	
1-May-19	445	125	2200	
9-May-19	406	125	2200	
16-May-19	460	125	2200	
23-May-19	465	125	2200	
30-May-19	470	125	2200	
6-Jun-19	400	125	2200	
12-Jun-19	476	125	2200	
20-Jun-19	496	125	2200	
27-Jun-19	405	125	2200	

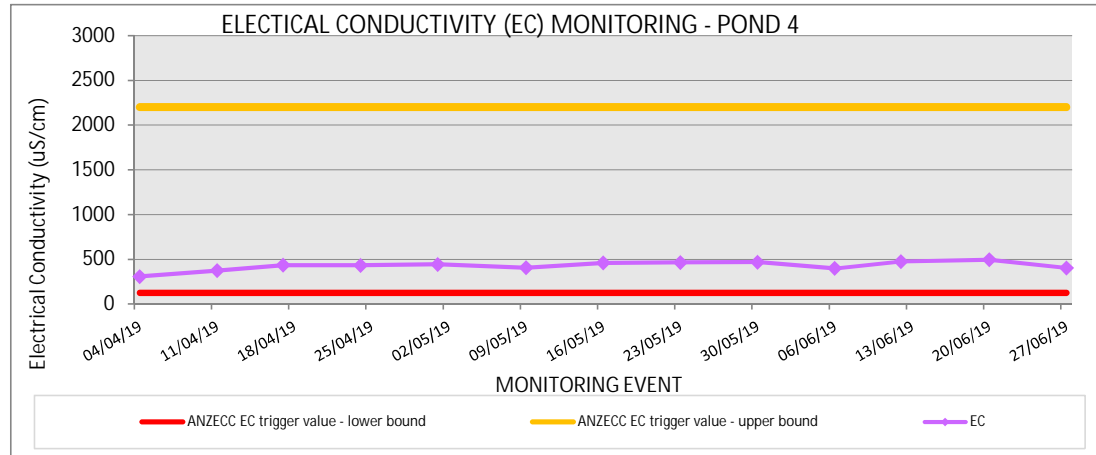

### Pond 4 Monitoring Location - Weekly Temperature Monitoring

**Pond 4 - Weekly Temperature Monitoring**  
April 2019 to June 2019

Monitoring Event	Temperature °C	Unable to Sample
4-Apr-19	22.6	
11-Apr-19	24.1	
17-Apr-19	25.2	
24-Apr-19	23.6	
1-May-19	19.2	
9-May-19	18.9	
16-May-19	20.8	
23-May-19	23.2	
30-May-19	15.2	
6-Jun-19	12.1	
12-Jun-19	17.9	
20-Jun-19	15.5	
27-Jun-19	16.9	

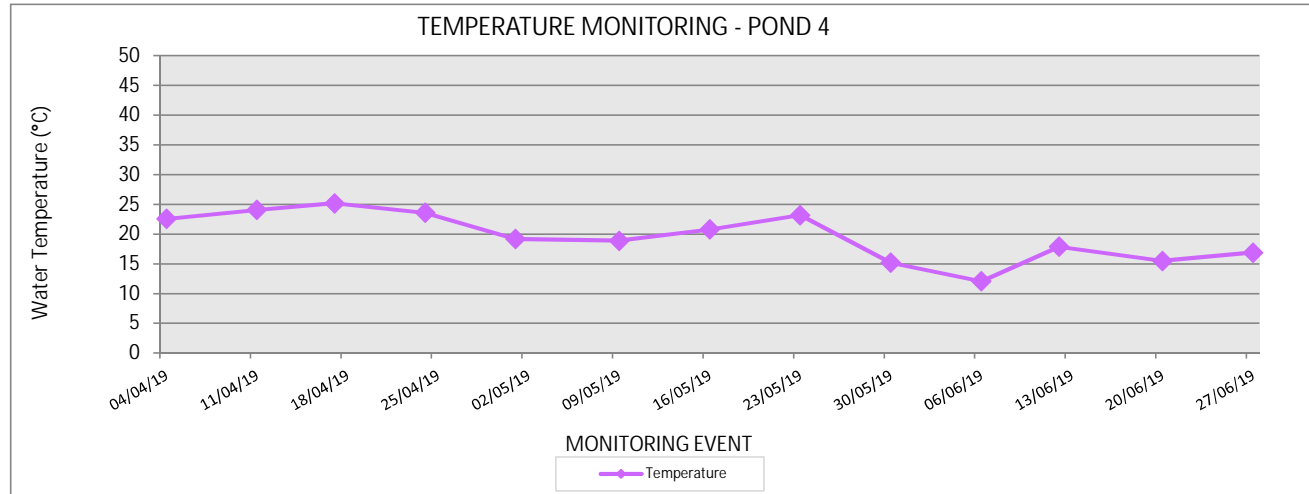


WIND ROSE PLOT:

**NCIA - Meteorological Data  
June Sampling Period - June 2019**

DISPLAY:

**Wind Speed  
Direction (blowing from)**

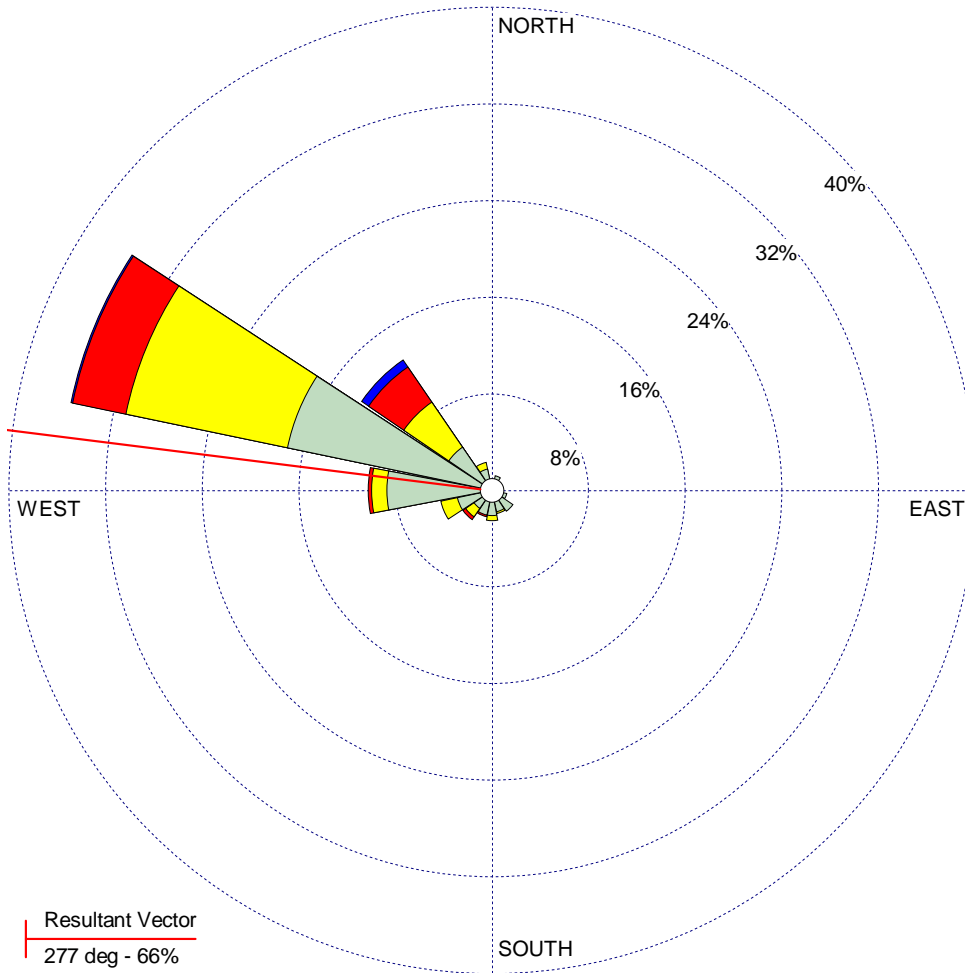

Resultant Vector  
277 deg - 66%

WIND SPEED  
(m/s)

- >= 11.1
- 8.8 - 11.1
- 5.7 - 8.8
- 3.6 - 5.7
- 2.1 - 3.6
- 0.5 - 2.1

Calms: 17.36%

COMMENTS:

DATA PERIOD:

**Start Date: 1/06/2019 - 01:00  
End Date: 30/06/2019 - 23:00**

COMPANY NAME:

MODELER:

CALM WINDS:

**17.36%**

TOTAL COUNT:

**712 hrs.**

AVG. WIND SPEED:

**1.65 m/s**

DATE:

**19/07/2019**

PROJECT NO.:

**60583731**

