

22 July 2025

Chris Schneider Managing Director National Ceramic Industries Australia PO Box 765 Maitland NSW 2320

Dear Chris

Environmental Monitoring for National Ceramic Industries Australia - June 2025

Please find enclosed the documentation for the environmental monitoring carried out for National Ceramic Industries Australia during June 2025. Sampling methodology and adopted assessment criteria are detailed below.

1.0 Sampling Methodology

Sampling was performed by AECOM Australia Pty Ltd (AECOM) and sample analysis was carried out by ALS (NATA accreditation 825). All sampling and analysis were carried out in accordance with Environmental Protection Authority (EPA) approved methods with reference to the following Australian Standards:

- monitoring of fine suspended particulates (PM₁₀) on the EPA six-day cycle in accordance with:
 - AS/NZS 3580.9.6 (2015) Methods for the Sampling and Analysis of Ambient Air Determination of Suspended Particulate Matter PM₁₀ High Volume Sampler with Size Selective Inlet Gravimetric Method.
- monitoring of fluorides in ambient air in accordance with:
 - AS/NZS 3580.13.2 (2013) Determination of fluorides Gaseous and acid-soluble particulate fluorides Manual, double filter paper sampling.
- meteorological monitoring in accordance with:
 - AS 3580.1.1 (2016) Methods for sampling and analysis of ambient air Part 1.1 Guide to siting air monitoring equipment.
 - AS 3580.14 (2014) Methods for sampling and analysis of ambient air Part 14: Meteorological monitoring for ambient air quality monitoring.
- monitoring of surface water quality in accordance with:
 - AS/NZS 5667.1:1998 (R2016) Guidance on the design of sampling programs, sampling techniques and the preservation and handling of samples.
 - AS/NZS 5667.4:1998 (R2016) Guidance on sampling from lakes, natural and manmade.

2.0 Assessment Criteria

Suspended particulate loads are assessed against the impact assessment criteria defined in the Project Approval conditions (09_0006 – National Ceramic Industries Australia Tile Manufacturing Facility Expansion Project, 19 January 2012). The assessment criteria for PM₁₀ (particulate matter with an aerodynamic diameter of less than 10 μ m) are:

- 50 μg/m³ over a 24-hour period
- 30 μg/m³ as an annual average.

Ambient fluoride concentrations are assessed against the guidelines defined in NSW EPA Approved Methods for the Modelling and Assessment of Air Pollutants in New South Wales (NSW EPA (2022)).

AECOM

The NSW EPA impact assessment criteria for ambient fluoride are:

- 2.9 μg/m³ over a 24-hour period
- 1.7 μg/m³ over a 7-day period.

Surface waters are assessed in accordance with default trigger values for physical and chemical stressors for southeast Australia in the *Australian and New Zealand Guidelines for Fresh and Marine Water Quality* (ANZG, 2018). These values are:

- pH in the range of 6.5 8.5 (Table 3.3.2 NSW Lowland River)
- electrical conductivity (EC) in the range of 125 2200 μS/cm (Table 3.3.3 NSW Lowland River).

3.0 Monitoring Results

Monitoring results for the month of June 2025 are presented in the attachments to this letter. Monitoring results for the preceding two months are also presented to demonstrate quarterly trends in results.

The June 2025 monitoring results show that all ambient PM_{10} results were below the short-term impact assessment criterion (50 μ g/m³) as defined in the DPIE Project Approval (Schedule 3, Condition 15, Table 2).

The PM₁₀ rolling annual average concentration at the Southeast site remains below the Project Approval annual criterion of 30 μ g/m³ with an average of 14.1 μ g/m³ following the June monitoring period. The Northwest annual average is also below the criteria and is sitting at 18.7 μ g/m³ following the completion of the June monitoring period.

Fluoride results for June remain below the relevant assessment criteria at both the Northwest and Southeast monitoring sites with no exceedances of either the 24-hour (2.9 $\mu g/m^3$) or 7-day (1.7 $\mu g/m^3$) criteria this month. It is noted that an additional 24-hour fluoride sample was taken at the Northwest monitoring site on 25 June, and a catchup sample is required for the Southeast monitoring site.

Pond 4, being the last detention pond on site before water potentially leaves the site is monitored for pH, electrical conductivity and temperature on a weekly basis. The adopted ANZG 2018 guidelines for pH and conductivity are the default trigger values for slightly disturbed aquatic ecosystems in NSW lowland rivers.

pH measurements for June 2025 were within both the upper and lower limits of the adopted quidelines.

Electrical conductivity measurements for June were within both upper and lower limits of the adopted guidelines. Water temperature was also measured however no guideline is available for assessment.

Pond 4 was observed to be flowing to offsite during site visits on 4 and 6 June however parameters measured on these days were within the required ANZG guidelines.

A figure showing the monitoring locations and monitoring results and plots can be found attached along with the wind rose for June. Laboratory certificates, field sheets and calibration data along with relevant meteorology data can be provided on request.

If you require any further information, please contact Cye Buckland on 0488 777 160.

Yours faithfully,


cye.buckland@aecom.com

Mobile: +61 488 777 160

encl: Monitoring data tables and charts, wind rose, monitoring locations

North West Monitoring Location - 24 hour PM10 Monitoring


North West - 24 hour PM10 Monitoring						
April 2025 to June 2025						
Monitoring Event	24-hr PM ₁₀	24-hr PM ₁₀ Criterion	PM ₁₀ Annual Average	PM ₁₀ Annual Average Criterion		
	(µg/m3)	(μg/m³)	(μg/m³)			
6-Apr-25	23.7	50	20.0	30		
12-Apr-25	11.8	50	19.9	30		
18-Apr-25	12.2	50	19.8	30		
24-Apr-25	16.7	50	19.8	30		
30-Apr-25	6.2	50	19.5	30		
6-May-25	14.5	50	19.5	30		
12-May-25	7.8	50	19.6	30		
18-May-25	6.8	50	19.2	30		
22-May-25	8.5	50	19.0	30		
30-May-25	21.5	50	18.6	30		
5-Jun-25	9.2	50	18.5	30		
11-Jun-25	10.8	50	18.5	30		
17-Jun-25	19.3	50	18.7	30		
23-Jun-25	20.3	50	19.0	30		
29-Jun-25	12.1	50	18.7	30		

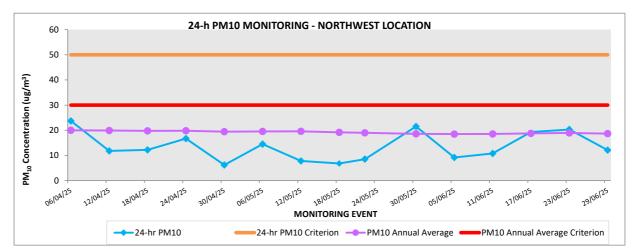

North West Monitoring Location - 7 Day Fluoride Monitoring

North West - 7 Day Fluoride Monitoring April 2025 to June 2025


Monitori	ng Event	Particulate Fluoride	Gaseous Fluoride	Total Fluoride	7-Day Guideline Criterion
Start Date	End Date	(μg/m³ as HF at STP)			
27-Mar-25	3-Apr-25	0.008	0.073	0.081	1.7
3-Apr-25	10-Apr-25	0.016	0.039	0.055	1.7
10-Apr-25	17-Apr-25	0.022	0.144	0.166	1.7
17-Apr-25	23-Apr-25	0.005	0.049	0.054	1.7
23-Apr-25	1-May-25	0.033	0.091	0.124	1.7
1-May-25	8-May-25	0.008	0.062	0.070	1.7
8-May-25	15-May-25	0.010	0.165	0.175	1.7
15-May-25	22-May-25	0.024	0.370	0.394	1.7
22-May-25	29-May-25	0.001	0.013	0.014	1.7
29-May-25	4-Jun-25	0.010	0.090	0.100	1.7
4-Jun-25	12-Jun-25	0.009	0.014	0.023	1.7
12-Jun-25	19-Jun-25	0.020	0.015	0.035	1.7
19-Jun-25	26-Jun-25	0.022	0.012	0.034	1.7
26-Jun-25	3-Jul-25	0.005	0.015	0.020	1.7

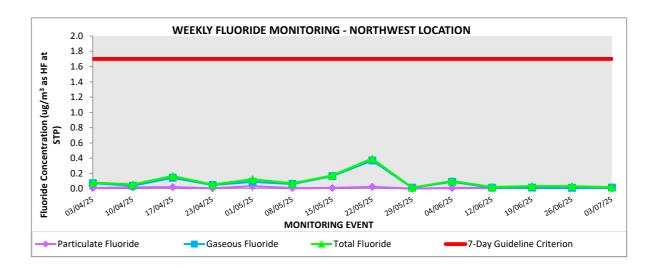

North West Monitoring Location - 24 hour Fluoride Monitoring

North West - 24 hour Fluoride Monitoring April 2025 to June 2025


Monitoring Event	24-hr Particulate Fluoride	24-hr Gaseous Fluoride	24-hr Total Fluoride	24-hr Total Fluoride Guideline Criterion
	(μg/m³ as HF at STP)	(μg/m³ as HF at STP)	(μg/m³ as HF at STP)	(μg/m³ as HF at STP)
06-Apr-25	0.014	0.068	0.082	2.9
12-Apr-25	0.014	0.111	0.125	2.9
18-Apr-25	0.016	0.089	0.105	2.9
24-Apr-25	0.015	0.132	0.147	2.9
30-Apr-25	0.015	0.063	0.078	2.9
06-May-25	0.015	0.095	0.110	2.9
12-May-25	0.015	0.155	0.170	2.9
18-May-25	0.015	0.210	0.225	2.9
24-May-25	0.007	0.054	0.061	2.9
30-May-25	0.019	0.122	0.141	2.9
05-Jun-25	0.020	0.033	0.053	2.9
11-Jun-25	0.021	0.023	0.044	2.9
17-Jun-25	0.021	0.027	0.048	2.9
23-Jun-25	0.021	0.029	0.050	2.9
25-Jun-25	0.018	0.009	0.027	2.9
29-Jun-25	0.025	0.047	0.072	2.9

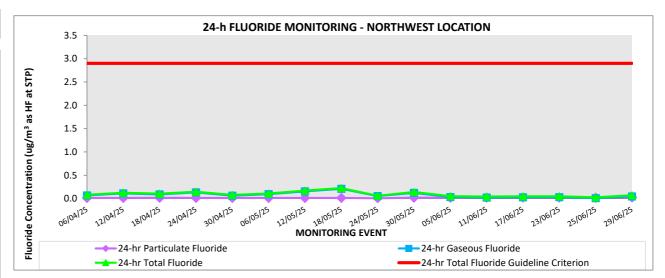

South East Monitoring Location - 24 hour PM10 Monitoring

South East - 24 hour PM10 Monitoring April 2025 to June 2025


Monitoring Event	24-hr PM ₁₀	24-hr PM ₁₀ Criterion	PM ₁₀ Annual Average	PM ₁₀ Annual Average Criterion
	(μg/m³)	(μg/m³)	(μg/m³)	
6-Apr-25	23.5	50	14.5	30
12-Apr-25	12.8	50	14.5	30
18-Apr-25	12.9	50	14.5	30
24-Apr-25	10.2	50	14.5	30
30-Apr-25	6.4	50	14.4	30
6-May-25	9.5	50	14.4	30
12-May-25	4.9	50	14.4	30
18-May-25	5.7	50	14.1	30
24-May-25	8.6	50	14.0	30
30-May-25	14.3	50	13.9	30
5-Jun-25	7.7	50	13.8	30
11-Jun-25	9.6	50	13.8	30
17-Jun-25	17.5	50	14.0	30
23-Jun-25	14.2	50	14.1	30
29-Jun-25	12.8	50	14.1	30

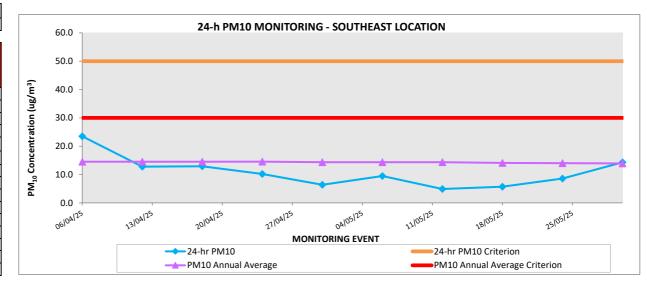

South East Monitoring Location - 7 Day Fluoride Monitoring

South East - 7 Day Fluoride Monitoring April 2025 to June 2025

Monitoring Event		Particulate Fluoride	Gaseous Fluoride	Total Fluoride	7-Day Guideline Criterion
Start Date	End Date	(μg/m³ as HF at STP)			
27-Mar-25	3-Apr-25	0.002	0.081	0.083	1.7
3-Apr-25	10-Apr-25	0.013	0.117	0.130	1.7
10-Apr-25	17-Apr-25	0.006	0.107	0.113	1.7
17-Apr-25	23-Apr-25	0.005	0.093	0.098	1.7
23-Apr-25	1-May-25	0.027	0.106	0.133	1.7
1-May-25	8-May-25	0.007	0.107	0.114	1.7
8-May-25	15-May-25	0.005	0.093	0.098	1.7
15-May-25	22-May-25	0.003	0.141	0.144	1.7
22-May-25	29-May-25	0.007	0.073	0.080	1.7
29-May-25	4-Jun-25	0.004	0.074	0.078	1.7
4-Jun-25	12-Jun-25	0.004	0.074	0.078	1.7
12-Jun-25	19-Jun-25	0.016	0.039	0.055	1.7
19-Jun-25	26-Jun-25	0.019	0.036	0.055	1.7
26-Jun-25	3-Jul-25	0.01	0.084	0.094	1.7

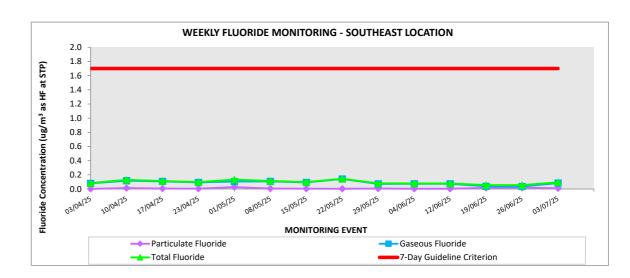


South East Monitoring Location - 24 hour Fluoride Monitoring

South East - 24 hour Fluoride Monitoring April 2025 to June 2025


Monitoring Event	24-hr Particulate Fluoride	24-hr Gaseous Fluoride	24-hr Total Fluoride	24-hr Total Fluoride Guideline Criterion
	(µg/m³ as HF at STP)	(µg/m³ as HF at STP)	(µg/m³ as HF at STP)	(µg/m³ as HF at STP)
6-Apr-25	0.017	0.009	0.026	2.9
12-Apr-25	0.018	0.186	0.204	2.9
18-Apr-25	0.01	0.097	0.107	2.9
24-Apr-25	0.019	0.232	0.251	2.9
30-Apr-25	0.036	0.096	0.132	2.9
6-May-25	0.019	0.336	0.355	2.9
12-May-25	0.164	0.171	0.335	2.9
18-May-25	0.016	0.216	0.232	2.9
24-May-25				2.9
30-May-25	0.018	0.1	0.118	2.9
5-Jun-25	0.037	0.041	0.078	2.9
11-Jun-25	0.02	0.032	0.052	2.9
17-Jun-25	0.02	0.033	0.053	2.9
23-Jun-25	0.02	0.061	0.081	2.9
29-Jun-25	0.02	0.062	0.082	2.9

²⁴ May sample failed to run

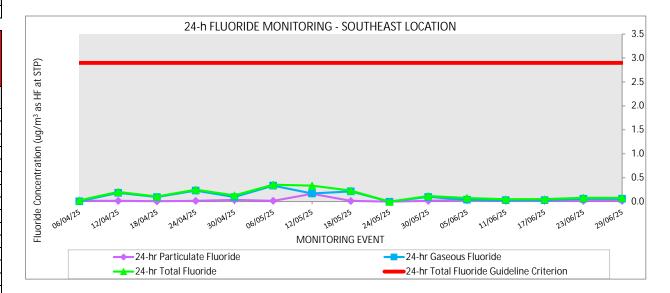

Pond 4 - Weekly pH Monitoring April 2025 to June 2025


Monitoring Event	рН	ANZG pH trigger value - lower bound	ANZG pH trigger value - upper bound	Unable to sample
	pН	pН	pН	
03-Apr-25	7.35	6.5	8.5	
10-Apr-25	7.89	6.5	8.5	
17-Apr-25	7.27	6.5	8.5	
23-Apr-25	7.34	6.5	8.5	
01-May-25	7.43	6.5	8.5	
08-May-25	7.54	6.5	8.5	
15-May-25	7.24	6.5	8.5	
04-Jun-25	7.60	6.5	8.5	
06-Jun-25	7.48	6.5	8.5	
12-Jun-25	7.57	6.5	8.5	
19-Jun-25	7.61	6.5	8.5	
26-Jun-25	7.83	6.5	8.5	

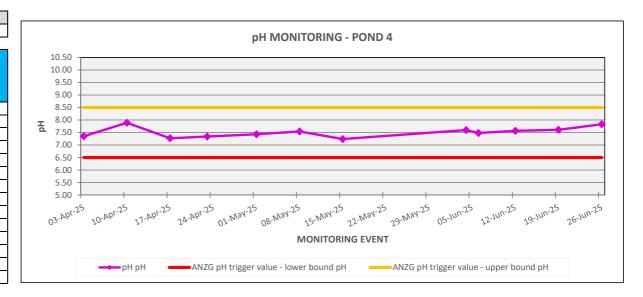

Pond 4 - Weekly EC Monitoring April 2025 to June 2025


Monitoring Event	EC	ANZG EC trigger value - lower bound	ANZG EC trigger value - upper bound	Unable to sample
	μS/cm	μS/cm	μS/cm	
03-Apr-25	109	125	2200	
10-Apr-25	274	125	2200	
17-Apr-25	282	125	2200	
23-Apr-25	286	125	2200	
01-May-25	-	125	2200	
08-May-25	211	125	2200	
15-May-25	288	125	2200	
04-Jun-25	166	125	2200	
06-Jun-25	142	125	2200	
12-Jun-25	995	125	2200	
19-Jun-25	213	125	2200	
26-Jun-25	225	125	2200	
N - 50				


No EC recorded for 1 May

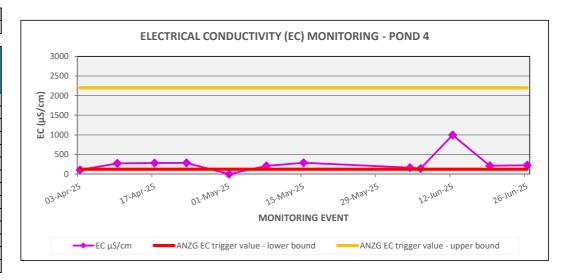


Pond 4 - Weekly Temperature Monitoring April 2025 to June 2025

Monitoring Event	Temperature	Unable to sample
	°C	
03-Apr-25	22.2	
10-Apr-25	23.4	
17-Apr-25	20.8	
23-Apr-25	26.6	
01-May-25	19.5	
08-May-25	20.3	
15-May-25	18.6	
04-Jun-25	14.4	
06-Jun-25	12.1	
12-Jun-25	12.5	
19-Jun-25	12.8	
26-Jun-25	12.5	

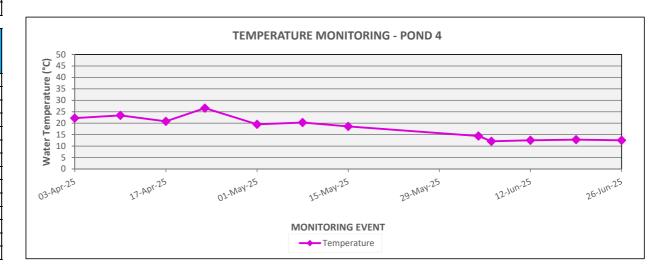

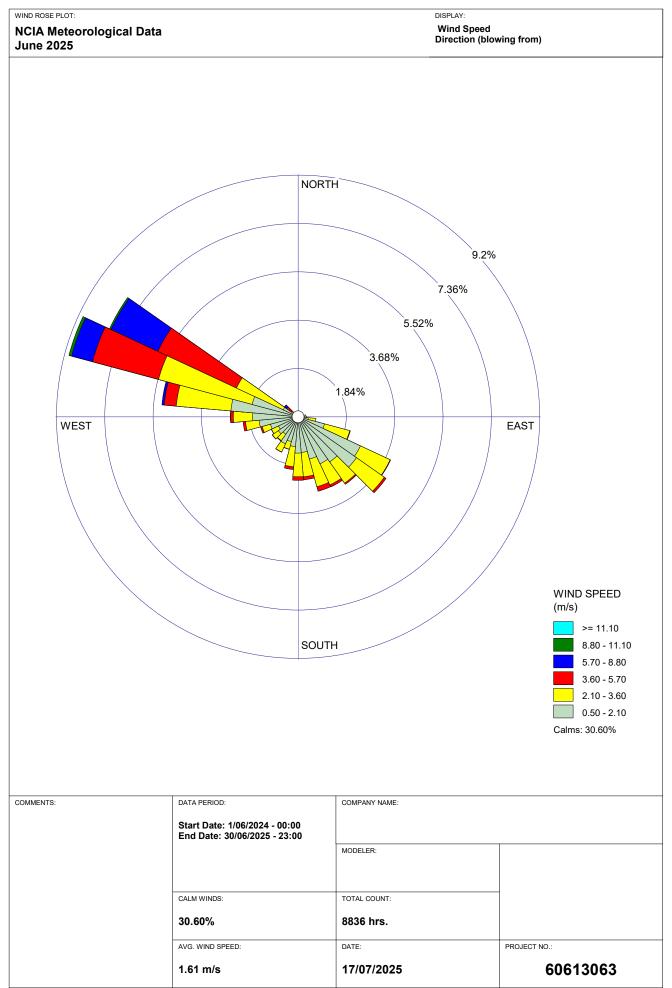

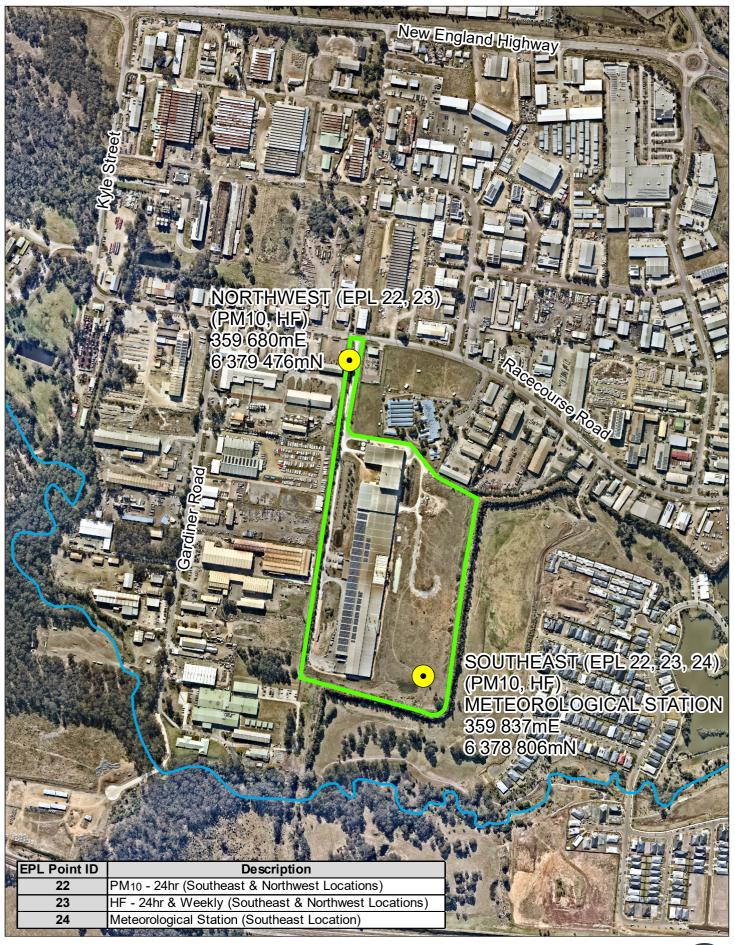

Legend

250 Meters 500

Ñ

•

Ambient Air Monitoring Station

NCIA Site Boundary

AECOM