

AECOM Australia Pty Ltd 17 Warabrook Boulevard Warabrook NSW 2304 PO Box 73 Hunter Region MC NSW 2310 Australia www.aecom.com

+61 2 4911 4900 tel +61 2 4911 4999 fax ABN 20 093 846 925

22 September 2020

Chris Schneider Managing Director National Ceramic Industries Australia PO Box 765 Maitland NSW 2320

Dear Chris,

# Environmental Monitoring for National Ceramic Industries Australia - August 2020

Please find enclosed the documentation for the environmental monitoring carried out for National Ceramic Industries Australia during August 2020. Sampling methodology and adopted assessment criteria are detailed below.

#### 1.0 Sampling Methodology

Sampling was performed by AECOM Australia Pty Ltd (AECOM) and sample analysis was carried out by ALS NATA accredited laboratory. All sampling and analysis was carried out in accordance with Environmental Protection Authority (EPA) approved methods with reference to the following Australian Standards:

Monitoring of fine suspended particulates ( $PM_{10}$ ) on the EPA six day cycle in accordance with:

AS/NZS 3580.9.6 (2015) Methods for the Sampling and Analysis of Ambient Air - Determination of Suspended Particulate Matter – PM<sub>10</sub> High Volume Sampler with Size Selective Inlet - Gravimetric Method.

Monitoring of fluorides in ambient air in accordance with:

AS/NZS 3580.13.2 (2013) Determination of fluorides—Gaseous and acid-soluble particulate fluorides—Manual, double filter paper sampling.

- Meteorological monitoring in accordance with:
  - AS 3580.1.1 (2016) Methods for sampling and analysis of ambient air Part 1.1 Guide to siting air monitoring equipment; and
  - AS 3580.14 (2014) Methods for sampling and analysis of ambient air Part 14: Meteorological monitoring for ambient air quality monitoring.
- Monitoring of surface water quality in accordance with: .
  - AS/NZS 5667.1:1998(R2016) Guidance on the design of sampling programs, sampling techniques and the preservation and handling of samples; and
  - AS/NZS 5667.4:1998(R2016) Guidance on sampling from lakes, natural and manmade.

#### 2.0 **Assessment Criteria**

Suspended particulate loads are assessed against the impact assessment criteria defined in the Project Approval conditions (09\_0006 - National Ceramic Industries Australia Tile Manufacturing Facility Expansion Project, 19 January 2012). The assessment criteria for PM<sub>10</sub> (particulate matter with an aerodynamic diameter of less than 10 µm) are:

- 50 µg/m<sup>3</sup> over a 24-hour period; and •
- 30  $\mu$ g/m<sup>3</sup> as an annual average. .

Ambient fluoride concentrations are assessed against the guidelines defined in NSW EPA Approved Methods for the Modelling and Assessment of Air Pollutants in New South Wales (NSW EPA (2016)). The NSW EPA impact assessment criteria for ambient fluoride are:

- 2.9 µg/m<sup>3</sup> over a 24-hour period; and •
- 1.7  $\mu$ g/m<sup>3</sup> over a 7-day period.



Surface waters are assessed in accordance with default trigger values for physical and chemical stressors for southeast Australia in the *Australian and New Zealand Guidelines for Fresh and Marine Water Quality* (ANZG, 2018). These values are:

- pH in the range of 6.5 8.5 (Table 3.3.2 NSW Lowland River); and
- Electrical conductivity (EC) in the range of 125 2200 µS/cm (Table 3.3.3 NSW Lowland River).

# 3.0 Monitoring Results

Monitoring results for the month of August 2020 are presented in the attachments to this letter. Monitoring results for the preceding two months are also presented to demonstrate quarterly trends in results.

The August 2020 monitoring results show that all ambient  $PM_{10}$  results were below the short-term impact assessment criterion (50 µg/m<sup>3</sup>) as defined in the DPIE Project Approval (Schedule 3, Condition 15, Table 2).

The PM<sub>10</sub> rolling annual average concentration at the South East site remains below the Project Approval annual criterion of 30  $\mu$ g/m<sup>3</sup> with an average of 22.8  $\mu$ g/m<sup>3</sup> following the August monitoring period. The North West annual average is currently above the criteria at 32.7  $\mu$ g/m<sup>3</sup> following the completion of the August monitoring period, largely due to elevated results recorded during November and December 2019 caused by regional heavy bushfire smoke.

Fluoride results for August remain below the relevant assessment criteria at both the North West and South East monitoring sites with no exceedances of either the 24 hour or 7 day criteria this month.

The adopted ANZG 2018 guidelines for pH and conductivity are the default trigger values for slightly disturbed aquatic ecosystems in NSW lowland rivers. pH measurements for August were recorded above the ANZG guideline 8.5 upper limit on all occasions. Importantly, Pond 4 was not observed to be discharging on these days. All conductivity measurements were within the relevant ANZG guidelines for August. Water temperature was also measured weekly however no guideline is available for assessment.

A figure showing the monitoring locations and monitoring results and plots can be found attached along with the wind rose for August. Laboratory certificates, field sheets and calibration data along with relevant meteorology data can be provided on request.

If you require any further information, please contact Cye Buckland on 0488 777 160.

Yours faithfully,

James Enright Scientist – Compliance Services james.enright@aecom.com


Direct Dial: +T +61 2 4911 4900 Direct Fax: +F +61 2 4911 4999 faul Wenter

Paul Wenta Principal Scientist - Air Quality paul.wenta@aecom.com


Mobile: +61 438 670 281 Direct Dial: +61 2 4911 4855 Direct Fax: +61 2 4911 4999


encl: Monitoring data tables and charts, monitoring locations, wind roses

#### North West Monitoring Location - 24 hour PM10 Monitoring

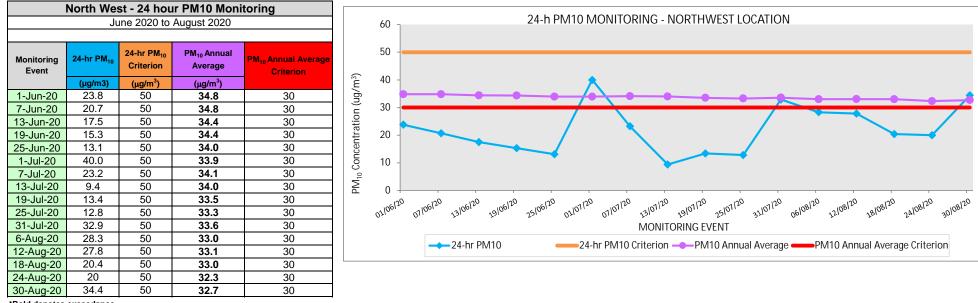


\*Bold denotes exceedance

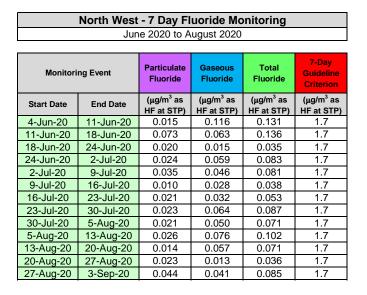


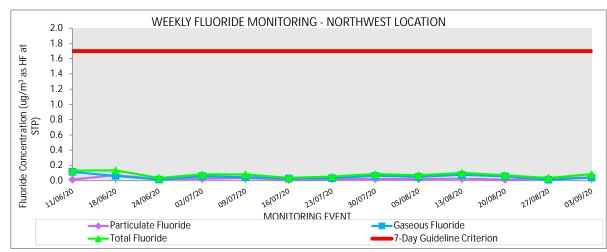



# North West Monitoring Location - 24 hour Fluoride Monitoring

North West - 24 hour Fluoride Monitoring				
June 2020 to August 2020				
Monitoring Event	24-hr Particulate Fluoride	24-hr Gaseous Fluoride	24-hr Total Fluoride	24-hr Totai Fluoride Guideline Criterion
	(μg/m <sup>3</sup> as HF at STP)	(μg/m <sup>3</sup> as HF at STP)	(μg/m <sup>3</sup> as HF at STP)	(µg/m <sup>3</sup> as HF at STP)
1-Jun-20	0.086	0.100	0.186	2.9
7-Jun-20	0.017	0.156	0.173	2.9
13-Jun-20	0.035	0.114	0.149	2.9
19-Jun-20	0.014	0.071	0.085	2.9
25-Jun-20	0.032	0.036	0.068	2.9
1-Jul-20	0.068	0.119	0.187	2.9
7-Jul-20	0.061	0.133	0.194	2.9
13-Jul-20	0.014	0.156	0.170	2.9
19-Jul-20	0.013	0.066	0.079	2.9
25-Jul-20	0.014	0.177	0.191	2.9
31-Jul-20	0.038	0.126	0.164	2.9
6-Aug-20	0.016	0.040	0.056	2.9
12-Aug-20	0.017	0.078	0.095	2.9
18-Aug-20	0.016	0.062	0.078	2.9
24-Aug-20	0.016	0.048	0.064	2.9
30-Aug-20	0.017	0.075	0.092	2.9

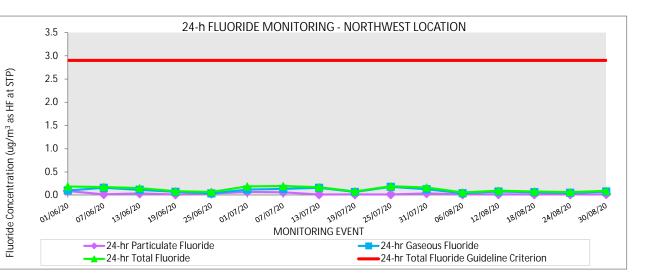

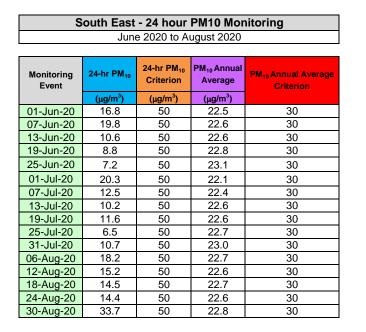

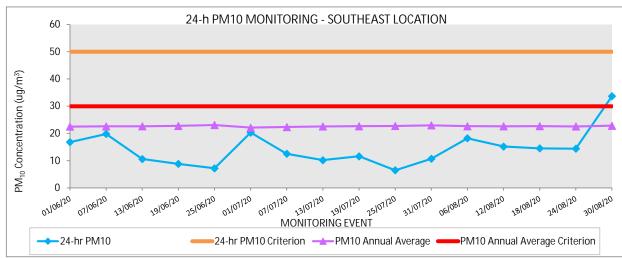

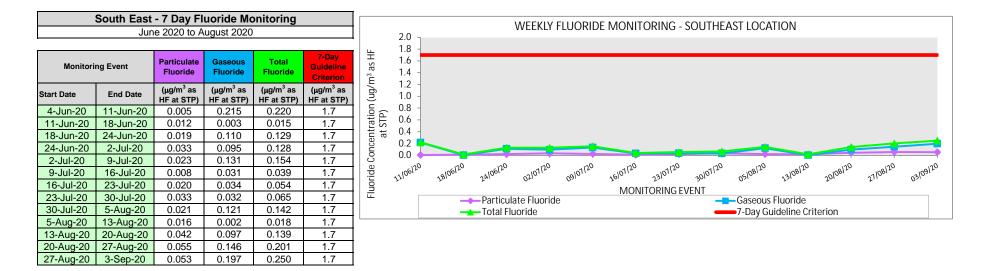

3.5 3.0

2.5

2.0

1.5

1.0

0.5

0.0


30108120

12/08/20

18108120

24/08/20

06/08/20

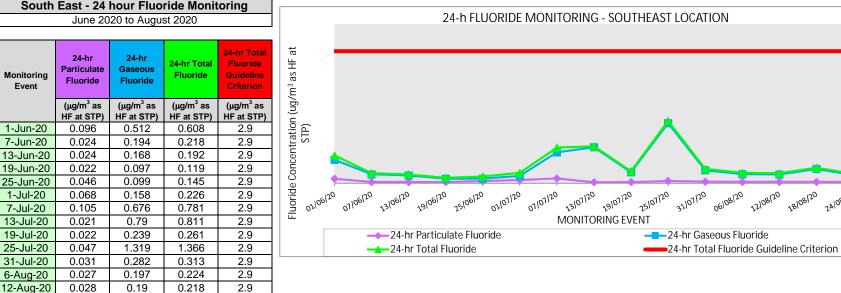

# South East - 24 hour Fluoride Monitoring

Event

18-Aug-20

24-Aug-20

30-Aug-20

0.027

0.026

0.055

0.311

0.177

0.576

0.338

0.203


0.631


2.9

2.9

2.9


### Pond 4 Monitoring Location - Weekly pH Monitoring

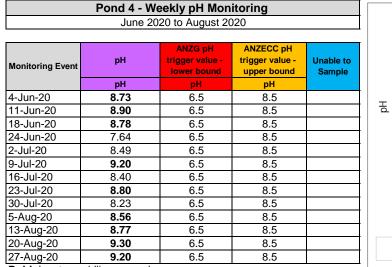

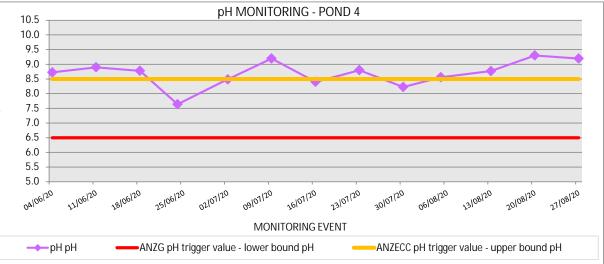

Bold denotes guidline exceedance

#### Pond 4 Monitoring Location - Weekly EC Monitoring

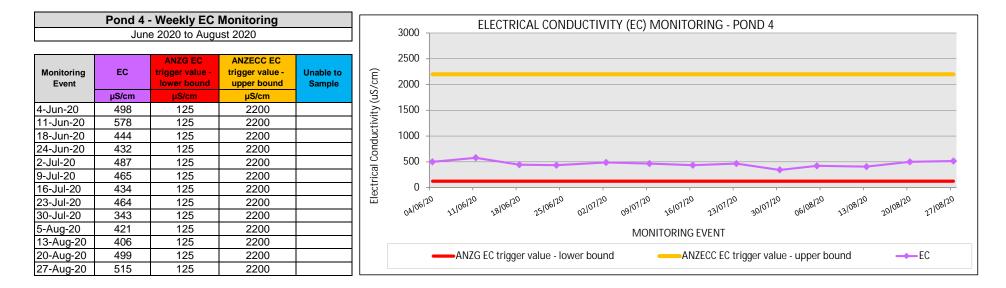

# Pond 4 Monitoring Location - Weekly Temperature Monitoring

